

COLLABORATIVE MOBILE CLOUDS: AN ENERGY EFFICIENT PARADIGM FOR CONTENT SHARING

Zheng Chang, Sheng Zhou, Tapani Ristaniemi, and Zhisheng Niu

ABSTRACT

On the way toward enabling efficient content distribution, reducing energy consumption and prolonging battery life of mobile equipment, an emerging paradigm, i.e., mobile cloud, which is based on content distribution, was proposed. As a mobile platform that is oriented toward content distribution, mobile cloud is also foreseen as an energy-efficient solution for future wireless networks. The benefits of using CMC for content distribution or distributed computing from social networking perspectives have been studied earlier. In this article, we first present the concepts of CMC and then discuss the energy-efficiency benefits from the system-level point-of-view as well as open challenges in designing a green CMC. Moreover, we investigate the problem of forming mobile clouds for the purpose of content distribution and energy-efficiency. Specifically, given a group of users interested in downloading the same content from an operator, an energy-aware based user selection and scheduling algorithm is proposed. Simulation examples show that a significant energy-saving performance can be achieved without depleting the battery of any user equipment by the proposed scheme. Also, the research potential is discussed in the context of CMC.

INTRODUCTION

With the birth of smart phones, our life is continually changing through the acceptance of boosted high speed wireless services. The emerging mobile applications including navigation, multimedia events, mobile games, social networking, mobile healthcare and commerce, make the user equipments (UEs), e.g., smartphones and tablets, an inseparable part of our lives. However, the rise of online services, while significantly increasing the frequency of users' online activities, also drain the batteries of user devices much faster than before. Moreover, typical mobile platforms are limited by their characteristics (e.g., speed of processor, size of data storage, and battery life) and communications resources (e.g., bandwidth and connectivity) [1], which hinders the development of future wireless networks as well as deteriorates the end-user experience. Mobile cloud computing provides one solution to these problems. However, when UEs access the cloud provider/server through cellular networks, the link is likely to be overloaded. Thus, a distributed computing and communications platform exploiting the comput-

ing capabilities of local devices and device-to-device (D2D) communications can be viewed as an alternative for mobile cloud computing [1, 2].

While researchers have mainly focused on investigating and utilizing the benefits of computing capabilities of the UEs, it is worth noting that such a distributed computing platform formed by a number of UEs can also bring other benefits, e.g., energy-savings at UEs. Based on the device-based computing platform, the concept has developed into a new paradigm of an intelligent content distribution architecture called Collaborative Mobile Cloud (CMC), which, among other features, encompasses D2D communications and other short-range (SR) transmission [3].

CMC was first proposed as a future paradigm for content distribution and content sharing among mobile users in social networks [4]. An example of data transmission with CMC can be found in Fig. 1. As shown in the figure, CMC consists of a number of UEs that actively use two wireless interfaces: one to communicate with a BS over a long-range (LR) wireless technology (such as UMTS/HSPA, WiMAX, or LTE), and one to cooperate with the other UEs over a SR communication link (such as Bluetooth or WLAN). Apart from the advantages in sharing, the CMC platform also has its advantages in the reduction of UEs' energy consumption [5, 6]. A typical CMC application aims at delivering data to a number of users who have common interests. In the conventional multicasting/unicasting scheme of Fig. 1, the UE has to download the whole content on its own. This leads to significant energy consumption by UE batteries, especially if the data rates are so low that they significantly increase the receiving time. In contrast, as shown in Fig. 1, several UEs forming a coalition through the concept of CMC can cooperatively receive parts of the required data from the BS, then exchange and share that data with others via an SR link. In such a case, each UE only needs to download parts of the data from the BS, and consequently, due to the fact that the data rate on SR links is usually higher, the receiving time of the UEs can be significantly reduced [5], saving energy [5, 6]. For other mobile applications, such as mobile games, CMC can also reduce the burden of one UE's processors and memory, as computing tasks can be carried out among a group of UEs [7]. Moreover, CMC can also be used to design a content distribution vehicular network [8]. However, despite the numerous CMC benefits, there are also quite

a few issues that need to be investigated when designing CMC. There are a limited number of works on the design of CMC, i.e., [4, 9]. For a similar content distribution architecture, the authors in [10] have presented a survey and discussed the implementation issues. In addition, the authors in [11] have also investigated the energy aware clustering problem for content distribution among a group of UEs and presented both centralized and distributed schemes. It can be well observed that the platform development of CMC for content distribution is still in its early stages.

In this article, we discuss the existing works on this subject and provide some novel insights on CMC design. Specifically, we first present the concepts of CMC, then we discuss its energy-saving benefits as well as open challenges in designing a green CMC. Moreover, we present an energy-aware user selection and scheduling algorithm. In addition, some future research directions and potentials are pointed out and discussed from both the social and technological perspectives.

COLLABORATIVE MOBILE CLOUD: CONCEPT, BENEFITS AND CHALLENGES

Let's consider a case where a number of UEs that are geographically close to each other are interested in downloading and sharing some popular content from a BS using LR wireless technology. In a traditional way, the BS can either unicast the content to each UE on a dedicated channel with a customized data rate depending on the individual UE's channel condition, or multicast the content one time to the UEs with a unified data rate that is limited by the worst channel condition among the UEs. In either case, each UE has to receive all the required data from the BS.

Figure 2 compares the transmission process of CMC with conventional transmission, e.g., unicast/multicasting. In Fig. 2, the CMC consists of four UEs. To present the concept of CMC in a simple way, we divide the overall data stream into four segments. In a conventional setup, the BS either separately streams the complete content to each requesting UE or multicasts the content one time to all requesting UEs. In either case, the communication interface of the stand-alone UE has to remain active for the entire reception duration, which depends on the length of the content. Therefore, a long receive time results in high energy consumption due to the required radio frequency (RF) and baseband processing during data reception. In the CMC, the BS can distribute various and exclusive segments of data to different UEs and the UEs can then exchange/share the received parts directly with other members by utilizing SR transmission among themselves [12]. Thus, compared to the conventional transmission, the receive time duration in CMC can be significantly reduced as the data rate of SR is usually higher than that of LR. However, in order to share the received data, new communication overhead, such as UE transmit power, is induced for some of the UEs. As we can see from Fig. 2, only three UEs are selected for distributing data while there is only receive energy consumption at the last UE. Consequently, the inherent energy-efficiency (EE) performance calls for an examination and discussion.

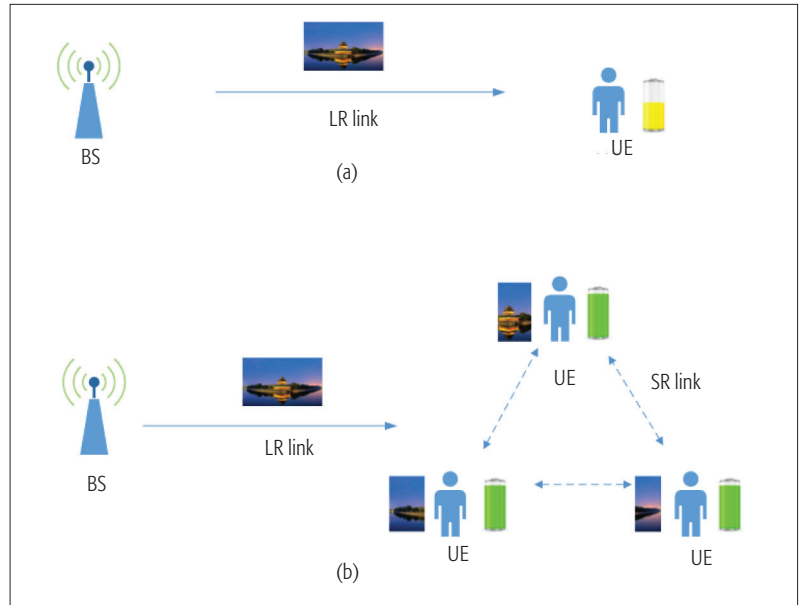


FIGURE 1. Data sharing with/without CMC: a) data transmission without CMC (conventional transmission); b) data transmission with CMC.

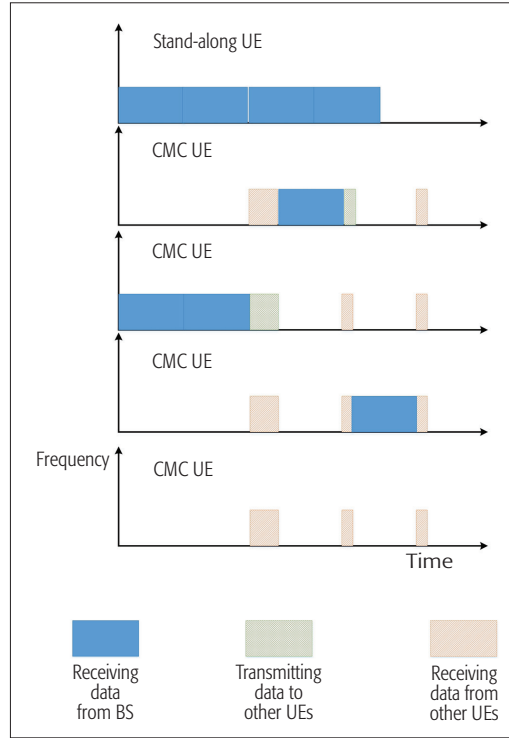


FIGURE 2. Collaborative mobile cloud compared with conventional stand-alone user.

Moreover, it is also worth noticing that there are two methods to deliver data between the BS and CMC. In the first method, a BS can transmit different packets to different UEs in parallel. In this case, more channel bandwidth is needed as the BS is simultaneously transmitting to different UEs with different data. The other way for the BS to transmit to the UEs is in sequence. For each data segment, one UE is selected as the receiver for the BS and transmitter for other UEs. In this approach, channel bandwidth can be effectively utilized. Here, we focus on the latter case. However, it is also of interest to explore the theoretical

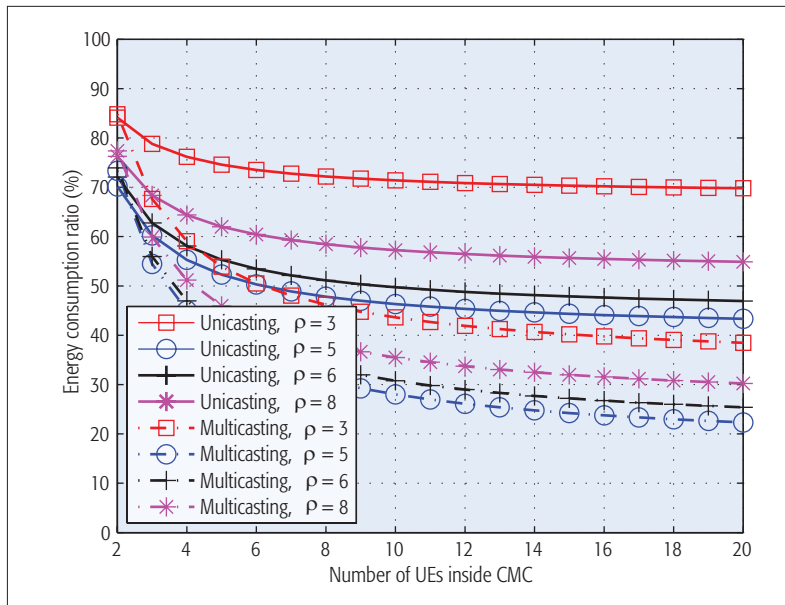


FIGURE 3. Energy consumption with multicasting and with unicast.

limits of both mechanisms. In addition, multicasting and unicast are also two options for transmission within CMC. The energy consumption performance of these two strategies is presented in Fig. 3, which considers the energy consumption parameters in [2]. The energy consumption ratio in Fig. 3 is obtained by the energy consumption of all the UEs when using CMC (either unicast or multicasting) normalized by the energy consumption of the conventional multicasting scheme. We also assume that in Fig. 3, the data rate of SR is ρ times better than LR. One can observe that with CMC, the UEs can save up to 75 percent of energy when downloading from the BS, which shows the energy-saving potential of CMC. Moreover, we can also see that there is an optimal value of the SR data rate, i.e., $\rho = 5$. This is mainly due to the fact that when the data rate is too high, higher energy consumption is needed for both transmitting and receiving.

As can be seen, CMC offers great energy-saving potential to the mobile devices. However, when designing a green CMC, there are some open problems:

- How can a CMC be formed?
- What performance gain can CMC bring from the EE point-of-view?
- Under what circumstances do the UEs come to join the cloud, and how do we stimulate the users to join?

Typically, scheduling in unicast or multicasting transmission often involves users' channel conditions or quality of service (QoS) requirements [5]. However, scheduling for CMC has some additional difficulties because of its structure. For example, the BS only sends exclusive data segments to a dedicated user in one scheduling time, and the dedicated user might have to sacrifice its own battery for the other CMC members. Thus, for CMC, we first discuss the involved principles and present a novel energy-aware user selection and scheduling algorithm. The impressive energy-saving gain as well as user fairness are presented to illustrate the advantages of CMC and our energy-aware proposals. Moreover, we will also

discuss other open research challenges to shed light on future directions.

ENERGY-AWARE USER SCHEDULING PRINCIPLE

One may observe that CMC is a candidate proposal toward energy-efficient wireless network design for content distribution and sharing in which the computation and storage capabilities of UEs are utilized. Although the discussions and results in Fig. 3 are based on a "perfect" scenario (e.g., practical issues such as channel conditions of different UEs are not considered), the energy-saving potential can still be clearly discerned. One may also notice that the aforementioned EE analysis relies on the willingness of UEs to join the CMC. In addition, energy-saving performance is also affected by SR data rates. Therefore, effective user scheduling for CMC is of considerable interest and importance. In the following, we will present one energy-aware scheduling method to tackle these issues. When forming a mobile cloud, the bottom line should be that none of the network elements can act as a dictator since UEs have to sacrifice for others. Thus, both the BS and the UEs should be involved in making decisions on when and which users are able to participate.

In previous works, game theoretic-based schemes have been applied for the design of a content distribution platform. In particular, cooperative games, such as coalition formation, have shown their effectiveness in user clustering design [8, 11, 13]. In this section, a scheduling method based on BS-UE interactions is presented. The flow of the introduced algorithm is summarized in Fig. 4. First, a candidate list containing a selection of UE names/IDs is provided to the BS. The candidate list consists of the numbers of UEs that can minimize energy consumption of SR transmission inside CMC. The BS will then schedule the users of the list to receive data segments based on its own objective and various energy consumption and fairness constraints.

UE DOMAIN: MOBILE CLOUD GATHERING

In order to minimize the energy consumed by distributing a single data content in a CMC, the distributor should be able to minimize the communication overhead that the CMC causes. Although it is possible to provide an optimal solution for minimizing energy consumption when the best candidate UE is chosen to receive certain data, it may lead to a situation where one user could always be assigned data no matter how low the user's battery may be. In this kind of situation, the UE will be excessively strained and consequently the battery will be drained. Therefore, instead of a single UE, a candidate list containing a number of potential UEs should be created, while the UEs in the list should have available energy for receiving and distributing data. The list should be based on energy consumption in an ascending order. The list is then fed back to the BS to make further decisions on which user should be assigned to receive the data segment, as shown in the left part of Fig. 4.

In the current standardization, there are no standardized content distribution/sharing protocols that would enable UEs to communicate with each other on the SR link and to collaboratively download content on the LR link. Therefore,

generic communications systems are assumed to take responsibility for these actions. As stated, UEs can download content from the BS via standardized UMTS or LTE and share the data among themselves through WiFi or Bluetooth. The created list can be reported as an attachment to the standard feedback mechanism.

BS DOMAIN: USER SELECTION AND SCHEDULING

After receiving the candidate list, the BS needs to evaluate and then make a decision on which UE should be selected to deliver a certain amount of data. Apparently a simple decision is not easy to make since different aspects need to be considered. When a UE is willing to join the cloud, it is not a good policy to drain its battery quickly because that can minimize energy consumption in multicasting the received data. Thus, the first constraint is to use a fairness indicator to measure the UE's contribution before each scheduling. Another constraint can be the UE's energy level since there should be enough energy left to satisfy the UE's operating cost. Combining the two criteria together, we could obtain the optimal or trade-off selection results. We will present some examples of the discussed constraints to evaluate our proposals in the following section.

ALGORITHM FLOWCHART

As presented in Fig. 4, which combines the proposed two schemes, a solution to gather a cloud can be arrived at. At the UE domain, each UE willing to join the CMC will be evaluated to see the transmit energy consumption if selected for transmission. Then a candidate list based on the evaluation is generated and reported to the BS. At the BS domain, after taking the energy fairness and energy consumption of UEs into consideration, the BS makes the decision and schedules one UE from the list. Then the data will be assigned to the scheduled UE and delivered to all the UEs in the CMC by the scheduled UE. Based on such an energy-aware scheduling algorithm, a CMC can be formed. The scheduled UE will be responsible for receiving data from the BS on the LR link and for transmitting the data to other UEs over the SR link in one time slot. With this approach, an energy saving gain similar to that shown in Fig. 3 can be achieved. The complexity of the algorithm is $\mathcal{O}(K)$, where K is the size of the list. Therefore, the CMC enables the data distribution and sharing features of the UEs, and it can also improve energy efficiency at the terminal sides.

DISCOVERING THE CONTEXT INFORMATION

While the accuracy of the presented scheme relies upon the candidate list creation as well as on its context, the candidate list creation depends on the UE's ability to obtain energy consumption information about data delivery to the fastest UE. To procure such cognitive, sensing-like capability, additional redundancy and modifications to the current devices are required. Therefore, we advocate an alternative for list generation. In this scheme, UEs only send to the BS a list with information about which UE is willing to join the cloud. Then the BS can monitor the energy level of each UE through feedback. At the beginning of scheduling, the round-robin method or other well-known methods can be applied so that the

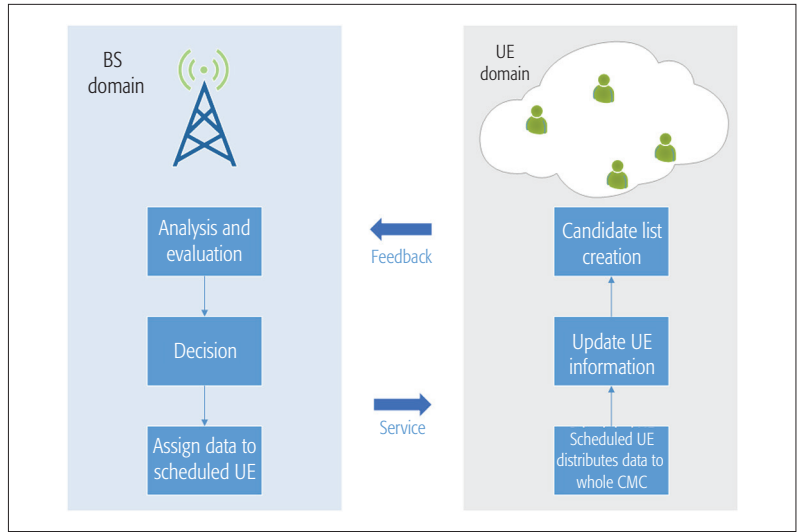


FIGURE 4. Algorithm flowchart.

BS will get to know the energy consumption of an individual UE when the UE distributes received data. Through such a procedure, the BS is able to estimate how much each UE consumes energy if chosen by the scheduler for a data assignment. It can be noted that the accuracy of the monitoring and estimation process may affect the decision of the BS. In this scheme, we assume that the information is accurate, and can be obtained by a standard feedback scheme. With comprehensive information acquisition, the BS can have information similar to that obtained through the context of the candidate list in the scheme presented previously. Finally, the BS can evaluate the UEs through its own decision function. Although, due to the monitoring or information collection process, extra energy is consumed in this alternative, it does not require modifications or transmission overhead to the UEs.

PERFORMANCE EVALUATION EXAMPLE

To illustrate our proposed energy-aware principle, we invoke the energy fairness function

$$f(\epsilon_k) = (1 - \epsilon_k)^{1/\beta}, \quad (1)$$

where ϵ_k is the contribution factor of UE k . It is defined as the data segments assigned to k normalized by total data prior to the scheduling time. When the UEs are willing to participate in the formulation of the CMC, from Eq. 1, we can see that a bigger value of $f(\epsilon_k)$ indicates that the UE contributes less for receiving and transmitting data in the CMC, which means that it consumes less energy. We refer to $\beta > 0$ as the fairness index and effectiveness of β is illustrated in the following section. It is worth noting that Eq. 1 is one example of defining fairness among the users. Based on different objectives, such as the design of incentive mechanisms to form the CMC, the definition of fairness can be varied accordingly. The decision function of the BS is assumed to be

$$\max U(\epsilon_k, \gamma_k) = f(\epsilon_k) \log_2(1 + \gamma_k),$$

where γ_k is the channel signal-to-noise ratio (SNR) from the BS to UE k . In Eq. 2, the decision func-

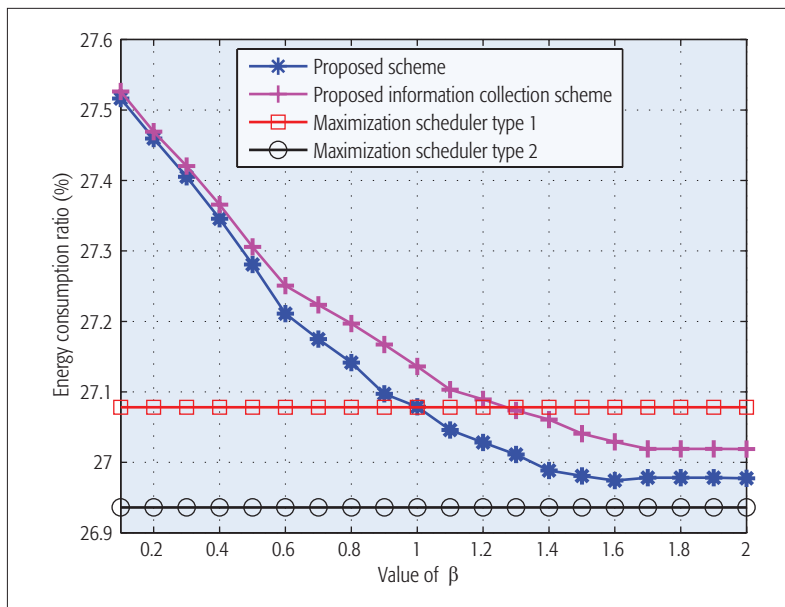


FIGURE 5. Total power consumption, where the CMC consists of 20 UEs.

tion comprises two factors: one is the contributions of the UE and the other is the data rate of the LR link. These two factors can show that the final decision involves both the BS and UE. It is worth noting that the increase in data rate of the LR link can decrease the receive time duration, which reduces the energy consumption of the UE. Therefore, by considering Eq. 2, a trade-off between energy fairness and EE for data transmission from the BS to the UEs can be achieved. Consequently, based on the maximization of decision function subject to certain artificial energy constraints, the BS can evaluate each UE in the candidate list. A typical constraint is the assurance of the UE's remaining energy level after the data has been assigned and distributed. The scheduling decision can be made according to the context of the candidate list and the evaluation of the BS. The problem can then be addressed through the scheme presented in the last section.

In Fig. 5, we compare our proposed scheme with other classical non-fair schedulers and with the presented information acquisition scheme. "Maximization scheduler type 1" means that the BS can select a user to maximize the BS to the UE data rate and transmit data to the selected user until it has no charge left. "Type 2" scheduler allows the BS to select the user at the first position of the list until that UE is drained of charge, which should provide the lowest energy consumption for the considered system. The simulation parameters are according to the ones in [2], where the impacts of RF, circuit and computing are all considered. In Fig. 5, we also present the results of using the presented information collection scheme. In particular, to obtain the knowledge of energy consumption of the UEs, a round-robin scheduling algorithm is applied at the BS. Once the comprehensive knowledge of energy consumption of the UEs is obtained, the BS can use Eq. 2 as the decision function to select a UE to assign the data to. Figure 5 shows that when our selection criteria is more fair (β is small), energy consumption is higher than with the "maximization scheduler type 1." When β is getting high-

er, the presented scheme can have lower energy consumption. However, due to the energy level protection mechanism, a performance to the level of the "type 2" scheduler can never be reached. We can also observe that the proposed context information collection scheme has a similar performance as the one we proposed in terms of curve shape. When β is small, the performance is almost the same since fairness is the main consideration. Also, when β is small, the proposed context information collection scheme has higher energy consumption due to the collection process.

Finally, Fig. 6 compares the use of CMC with the conventional multicasting scheme via energy consumption snapshots. The CMC consists of 30 UEs: four of them are selected to illustrate the energy consumption performance. The stand-alone UE uses a conventional multicasting scheme to receive from the BS. Figure 6a shows the energy consumption of the stand-alone UE and some of the CMC UEs with a single data segment transmission. UE #10 is the scheduled UE in this case. For a single data segment transmission, due to the transmit energy consumption inside the CMC, the energy consumption of the scheduled UE is higher than for the stand-alone UE which is not part of the CMC. In Fig. 6b, the energy consumption of UEs for receiving 10 assigned data segment is presented. We can see that in the case of the assigned data segments, several UEs are being scheduled. Therefore, the energy consumption of the CMC UEs is lower than that of the stand-alone UE, which confirms the advantages of the CMC model and of the presented schemes.

OPEN ISSUES AND FUTURE CHALLENGES

USE CASE OF CMC

In this work, we consider our system model as a CMC formed by multiple users. However, the application of CMC should not be limited solely by user cooperation. It is also reasonable to consider CMC in different applications, e.g., vehicular networks [14] or femtocell/HeNB, when neighbors like to download the same multimedia content [15]. It is worth noting that in vehicular networks, due to fast speeds and deep fading, some data packets might be lost during the vehicular network broadcasting stage. To support reliable transmissions, proper approaches should be investigated to complement the missing data among the users [14] or to inform the BS to retransmit the data.

RESOURCE ALLOCATION

For a CMC formed by a number of elements in wireless networks, the design of the resource allocation algorithm is quite critical as far as its EE performance and efficient and effective exploitation of its potential are concerned. Moreover, the resource allocation scheme should also consider the service stability and throughput requirement. The problem here concerns how to allocate radio resources, such as frequency subchannels in the context of OFDMA networks, transmit power, etc. Moreover, the scheduled UE may require the other UEs to act as a relay to deliver the data to all the CMC members. For the relaying transmission, the protocol should be carefully designed as additional transmit power is involved. The objec-

tive of resource allocation methods is to maximize EE while the service stability and throughput requirement can be guaranteed.

INCENTIVE CONSIDERATION

Building up a CMC platform creates the conditions to increase the potential of cooperation among users driven by selfish considerations. The platform can also be used for social networking development, as the delivery of interesting social content can be speeded up among CMC members. Given the self-interested nature of users, it is also crucial to design appropriate incentives that encourage the user to form the CMC. Leveraging the coalitional game theory and utilizing the potential energy-saving benefits of CMC as individual profits can be the starting point for finding a way to stimulate selfish mobile users to share popular content [8, 13, 14]. In addition, utilizing some of the advanced technologies, such as wireless power transfer, to bring energy to the UEs that join the CMC is also a potential incentive mechanism to gather UEs [5].

Network operators can also generate revenue if the multimedia content is completely distributed on the LR (generally, communication on the SR is free, for example, via Bluetooth or WiFi Direct), since more users will download the content from the operator's network. On the other hand, SR collaboration frees more LR resources, which leads to reduced user blocking rates and allows the utilization of the freed resources to accommodate more content distribution requests (thus leading to more revenue). Consequently, the economic frameworks that consider how to maximize the operators' profits and whether it is possible to refund the UEs that download content for others are of particular interest.

CONTENT/CONTEXT-BASED MECHANISM

Most of the discussions in this article deal with scheduling issues. We only consider constraints of radio resources, such as energy consumption, without exploring the effects of data content and context. However, as the future network is expected to provide various mobile data applications with different content and each type of content is associated with a particular desired QoS, a content-based or context-based distribution method for data offloading and/or resource allocation is necessary. Moreover, it is apparent that due to the heterogeneous nature of mobile users, the users also have different QoS requirements and different positions within CMC. Those features, of either UE or data, should not deteriorate the energy-saving performance of CMC. Nevertheless, they still present new obstacles to the development of an energy-efficient CMC. Therefore, there is a need to design algorithms to facilitate the diversity and utilize the advantages of data content or context to improve system performance.

SIGNALING OVERHEAD

CMC in general forms the basis for the effectiveness of D2D communications. Thus, the signaling between UEs and the BS and signaling among UEs can affect the EE performance. Indeed, we need to quantify the trade-off in the exchanged signaling information on energy consumption performance. The level of required signaling highly depends on

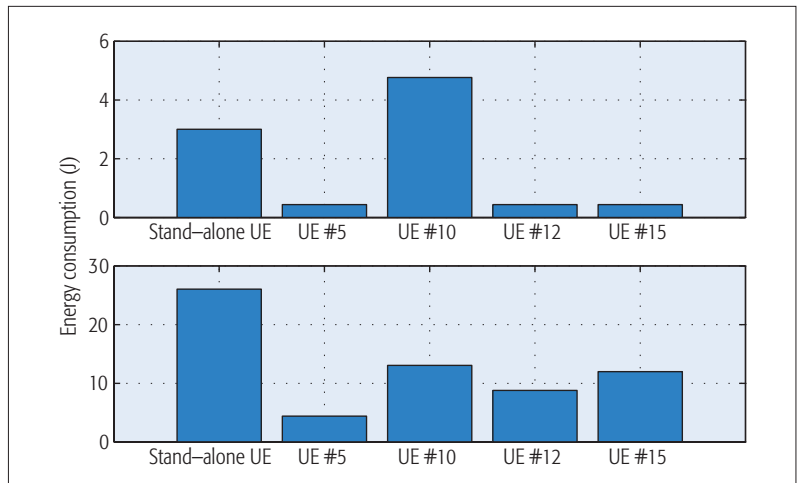


FIGURE 6. Snapshot of the proposed algorithm, where the CMC consists of 30 UEs.

the protocol implementation, whether distributed, centralized or hybrid. The overhead due to signaling should not have much impact on the energy savings benefits or lead to additional delays affecting the overall performance gains or the target QoS requirements. Hence, the signaling overhead for cooperative content distribution architectures needs to be quantified and assessed and efficient practical D2D communications protocols with a minimal signaling overhead should be developed.

DELAY AND THROUGHPUT CONSIDERATIONS

In this work, we focus on the EE aspect of the CMC. It is worth noting that there are other factors that might influence the performance of the CMC, such as delay and throughput. The current algorithm is primarily designed for delay-insensitive applications. Although, for packet-switching networks, the delay problem is not as serious as for circuit-switching systems, research on overcoming the CMC delay problem is still worthwhile. The research within this area can focus on the trade-off between EE, throughput and delay. Another topic of interest is how to design a pricing strategy to compensate for the induced time delay, which leads to game theoretic approaches.

CONCLUSION

In this article, we first explored the energy saving potential of collaborative mobile cloud. The benefits as well as open challenges of CMC were also elaborated. Moreover, with an example of forming a CMC, a principle based on energy-aware user grouping was introduced to investigate when and how the users should participate in forming the cloud. The proposed scheme took both the BS and UE aspects into consideration and tried to find a trade-off between energy consumption reduction and fairness. Moreover, in addition to introducing the idea of the gathering of a cloud, future research directions were pointed out and discussed from both the social and technological perspectives.

ACKNOWLEDGMENT

This work is sponsored in part by the Academy of Finland (No. 284748, No. 297642) and the Nature Science Foundation of China (No. 61461136004, No. 61571265, No. 91638204).

The proposed scheme took both the BS and UE aspects into consideration and tried to find a trade-off between energy consumption reduction and fairness. Moreover, in addition to introducing the idea of the gathering of a cloud, some future research directions were pointed out and discussed from both social and technological perspectives.

REFERENCES

- [1] W. Zhang *et al.*, "Energy-Optimal Mobile Cloud Computing under Stochastic Wireless Channel," *IEEE Trans. Wireless Commun.*, vol. 12, no. 9, Sept. 2013, pp. 4569–81.
- [2] D. Datla *et al.*, "Wireless Distributed Computing in Cognitive Radio Networks," *Ad Hoc Networks*, vol. 10, April 2012, pp. 845–57.
- [3] M. V. Pederson and F. H. P. Fitzek, "Mobile Clouds: The New Content Distribution Platform," *Proc. IEEE*, vol. 100, 2012, pp. 1400–03.
- [4] M. Katz *et al.*, "Mobile Clouds as the Building Blocks of Shareconomy: Sharing Resources Locally and Widely," *IEEE Vehic. Technol. Mag.*, vol. 9, no. 3, Sept. 2014, pp. 63–71.
- [5] Z. Chang *et al.*, "Energy Efficient Resource Allocation and User Scheduling for Collaborative Mobile Clouds with Hybrid Receivers," *IEEE Trans. Vehic. Technol.*, in press, 2016.
- [6] L. Al-Kanj, H. V. Poor, and Z. Dawy, "Optimal Cellular Offloading Via Device-to-Device Communication Networks with Fairness Constraints," *IEEE Trans. Wireless Commun.*, vol. 13, no. 8, Aug. 2014, pp. 4628–43.
- [7] F. Chi *et al.*, "Ad-Hoc Cloudlet Based Cooperative Cloud Gaming," *IEEE Trans. Cloud Computing*, in press, 2015.
- [8] T. Wang *et al.*, "Dynamic Popular Content Distribution in Vehicular Networks Using Coalition Formation Games," *IEEE JSAC*, vol. 31, no. 9, Sept. 2013, pp. 538–47.
- [9] F. H. P. Fitzek *et al.*, "Implementation of Network Coding for Social Mobile Clouds," *IEEE Signal Processing Mag.*, vol. 30, no. 1, Jan. 2013, pp. 159–64.
- [10] L. Al-Kanj, Z. Dawy, and E. Yaacoub, "Energy-Aware Cooperative Content Distribution over Wireless Networks: Design Alternatives and Implementation Aspects," *IEEE Commun. Surveys Tutorials*, vol. 15, no. 4, 2013, pp. 3828–47.
- [11] L. Al-Kanj *et al.*, "Energy-Aware Cooperative Content Distribution over Wireless Networks: Optimized and Distributed Approaches," *IEEE Trans. Vehic. Technol.*, vol. 62, no. 8, 2013, pp. 1736–60.
- [12] M. Chen *et al.*, "On the Computation Offloading at Ad Hoc Cloudlet: Architecture and Service Modes," *IEEE Commun. Mag.*, vol. 53, no. 6, June 2015, pp. 18–25.
- [13] D. Niyato *et al.*, "Controlled Coalitional Games for Cooperative Mobile Social Networks," *IEEE Trans. Vehic. Technol.*, vol. 60, no. 4, May 2011, pp. 1812–24.
- [14] T. Wang, L. Song, and Z. Han, "Coalitional Graph Games for Popular Content Distribution in Cognitive Radio VANETs," *IEEE Trans. Vehic. Technol.*, vol. 62, no. 8, Oct. 2013, pp. 4010–19.
- [15] X. Guo *et al.*, "Data Offloading and Task Allocation for Cloudlet-Assisted Ad Hoc Mobile Clouds," *Wireless Networks*, 2016, DOI:10.1007/s11276-016-1322-z.

BIOGRAPHIES

ZHENG CHANG [M] (zheng.chang@jyu.fi) received the B.Eng. degree from Jilin University, Changchun, China in 2007, the M.Sc. (Tech.) degree from Helsinki University of Technology (now Aalto University), Espoo, Finland in 2009, and the Ph.D. degree from the University of Jyväskylä, Jyväskylä, Finland in 2013. From June to August 2013, he was a visiting student at Tsinghua University; from April to May 2015, he was a visiting researcher at the University of Houston, TX, USA. Currently he is working at the University of Jyväskylä. His research interests include cooperative communications, radio resource allocation, and green communications.

SHENG ZHOU [M] (sheng.zhou@tsinghua.edu.cn) received his B.S. and Ph.D. degrees in electronic engineering from Tsinghua University, China, in 2005 and 2011, respectively. He is currently an associate professor in the Electronic Engineering Department, Tsinghua University. From January to June 2010, he was a visiting student at the Wireless System Lab, Electrical Engineering Department, Stanford University, CA, USA. His research interests include cross-layer design for multiple antenna systems, cooperative transmission in cellular systems, and green wireless communications.

TAPANI RISTANIEMI [SM] (tapani.ristaniemi@jyu.fi) received his M.Sc. in 1995 (mathematics), the Ph.Lic. in 1997 (applied mathematics), and the Ph.D. in 2000 (wireless communications), all from the University of Jyväskylä, Jyväskylä, Finland. Currently, he is a full professor at the University of Jyväskylä. He is also an adjunct professor at Tampere University of Technology. In 2013 he was a visiting professor in the School of Electrical and Electronic Engineering, Nanyang Technological University, Singapore. He is also a co-founder of Magister Solutions Ltd. His research interests are in the areas of brain and communication signal processing and wireless communication systems research.

ZHISHENG NIU [F] (niuhs@tsinghua.edu.cn) graduated from Beijing Jiaotong University, China, in 1985, and received his M.E. and D.E. degrees from Toyohashi University of Technology, Japan, in 1989 and 1992, respectively. From 1992 to 1994, he worked for Fujitsu Laboratories Ltd., Japan. In 1994 he joined Tsinghua University, Beijing, China, where he is now a professor in the Department of Electronic Engineering. His major research interests include queueing theory, traffic engineering, mobile Internet, radio resource management of wireless networks, and green communication and networks.