

Timely Status Update in Wireless Uplinks: Analytical Solutions With Asymptotic Optimality

Zhiyuan Jiang¹, Bhaskar Krishnamachari², Senior Member, IEEE, Xi Zheng¹, Sheng Zhou¹,
and Zhisheng Niu¹, Fellow, IEEE

Abstract—In a typical Internet of Things (IoT) application where a central controller collects status updates from multiple terminals, e.g., sensors and monitors, through a wireless multiaccess uplink, an important problem is how to attain timely status updates autonomously. In this paper, the timeliness of the status is measured by the recently proposed age-of-information (AoI) metric; both the theoretical and practical aspects of the problem are investigated: we aim to obtain a scheduling policy with minimum AoI and, meanwhile, requires little signaling exchange overhead. Toward this end, we first consider the set of arrival-independent and renewal policies; the optimal policy thereof to minimize the time-average AoI is proved to be a round-robin policy with one-packet (latest packet only and others are dropped) buffers (RR-ONE). The optimality is established based on a generalized Poisson-arrival-see-time-average theorem. It is further proved that RR-ONE is asymptotically optimal among all policies in the massive IoT regime. The AoI steady-state stationary distribution under RR-ONE is also derived. An implementation scheme of RR-ONE is proposed which can accommodate dynamic terminal appearances with little overhead. In addition, considering scenarios where packets cannot be dropped, a Lyapunov optimization-based max-AoI-weight policy is proposed which achieves better performance compared with state-of-the-art.

Index Terms—Age-of-information (AoI), Internet of Things (IoT), queuing theory, status update, wireless multiaccess channel.

I. INTRODUCTION

INTERNET of Things (IoT) represents one of the biggest paradigm shifts recently which can revolutionize the information technology and several aspects of everyday-life, such as living, e-health, and driving; it envisions to transform every physical object into an intelligent individual that is capable of



Fig. 1. Status update example with one source (sampler), one destination, and a single queue to illustrate AoI, wherein a_i denotes the arrival time of a packet and s_i denotes the update time of a packet.

sensing, communicating, and computing. By 2021, Ericsson predicts that there will be around 28 billion IoT devices and a large share of them are empowered by wireless communication technologies [2]. The wireless communication community has dedicated a significant amount of efforts to accommodate such a massive number of emerging IoT devices; in particular, it is one of the main targets of the 5G system that 100-fold more connected devices per geographical area should be supported compared with current LTE systems [3]. In addition to the sheer amount of IoT devices, it is also desired to enhance the timeliness of services for time-critical applications whereby the service quality depends heavily on the freshness of the monitoring data collected from IoT devices, e.g., the Tactile Internet and autonomous driving [4].

Age-of-information (AoI) is a recently proposed metric specifically to quantify such timeliness [5]–[12]; it is a constantly evolving information monitoring delay at a destination node, or simply put, time elapsed since the last-updated packet's generation. This definition jointly accounts for the delay introduced by sampling the information source and data communication, which distinguishes AoI from the conventional end-to-end communication (queuing and transmission) delay metric [13], [14]. Consider a concrete example in Fig. 1. The AoI only coincides with the communication delay at the time when a status update packet is delivered; another distinct difference is that the communication delay is defined for each packet; in contrast, the AoI is a constantly evolving measurement at the destination. AoI is particularly meaningful for status information that exhibits Markovian property—a new status renders an old status much less valuable or even useless; examples of such information include sensing information for temperature, pressure, etc. The remote estimation of information sources which have Markovian property is the problem of interest in this paper, and it has many applications in IoT wherein sensing plays a pivotal role. It was shown in

Manuscript received August 5, 2018; revised November 2, 2018 and December 20, 2018; accepted January 7, 2019. Date of publication January 15, 2019; date of current version May 8, 2019. This work was supported in part by the Nature Science Foundation of China under Grant 61701275, Grant 91638204, Grant 61571265, Grant 61621091, and Grant 61861136003 and in part by Hitachi, Ltd. Part of the work was presented at the IEEE International Symposium of Information Theory 2018 [1]. (Corresponding author: Sheng Zhou.)

Z. Jiang is with the Shanghai Institute for Advanced Communication and Data Science, Shanghai University, Shanghai 200444, China (e-mail: zhiyjiang@foxmail.com).

B. Krishnamachari is with the Ming Hsieh Department of Electrical Engineering, University of Southern California at Los Angeles, Los Angeles, CA 90089 USA (e-mail: bkrishna@usc.edu).

X. Zheng, S. Zhou, and Z. Niu are with the Tsinghua National Laboratory for Information Science and Technology, Tsinghua University, Beijing 100084, China (e-mail: zhengx14@mails.tsinghua.edu.cn; sheng.zhou@tsinghua.edu.cn; niuzhs@tsinghua.edu.cn).

Digital Object Identifier 10.1109/JIOT.2019.2893319

[15, Lemma 1] that the mutual information between a Markov information source and a destination is a non-negative and nonincreasing function of the AoI in a single-link scenario. Therefore, optimizing the AoI is equivalent of maximizing the mutual information between sources and destinations in remote estimations. In fact, it was further proposed [16] that for a particular class of applications, AoI should be considered as an end metric which jointly considers several metrics, e.g., throughput, end-to-end delay, and lossless or lossy designs, such that different systems with distinct characterizations in each metric can be compared fairly. The wireless communication system is therefore well motivated to optimize the AoI, however, this objective may deviate from the conventional throughput- or delay-oriented paradigms since it has been shown that the optimization of AoI leads to distinctively different system designs, e.g., sampling strategy and service principle [6].

One of the fundamental restrictions of wireless communication systems is that transmissions are subject to interference due to the broadcast nature of electromagnetic waves, leading to the fact that IoT terminals cannot transmit simultaneously; otherwise collisions happen and transmissions fail with no data delivered. Therefore, terminals should be carefully *scheduled* to avoid such collisions; as a result, delay is introduced. For instance, a simple scheduling strategy is that terminals take turns to update their status data to avoid collisions. Intriguingly, we will show that taking turns (a round-robin scheduling policy with proper packet management) is, to some extent, the optimal policy without entailing a large amount of signaling overhead.

The overhead issue touches upon another important design principle in *wireless multiaccess uplinks*, especially with massive distributed IoT devices, that is, the policy design is preferably *decentralized*.

Definition 1 (Decentralized Scheduling): A decentralized scheduling scheme is defined as a scheme wherein the transmission scheduling decisions are made autonomously at terminals and require only local information.

For instance, the carrier-sensing-medium-access (CSMA) protocol is a widely used and successful application of decentralized protocol in wireless networks [17]. In particular, terminals transmit based on a contention protocol and scheduling decisions are made in a decentralized manner. However, the CSMA protocol is designed only for throughput maximization and may face severe challenges in status update systems. Note that this definition, in line with the CSMA scheme, allows certain signaling exchange, e.g., feedback from the central controller, as long as the scheduling decisions are made autonomously to avoid overhead scaling with the number of terminals.

Concerning the aforementioned scenario and corresponding challenges, the contributions of this paper include the following.

- 1) Among arrival-independent renewal (AIR) scheduling policies, whose decisions are independent of packet-arrival processes and hence decentralization-friendly, a round-robin policy with one-packet buffers (only retains the most up-to-date packet and others are discarded)

at terminals (RR-ONE) is proved optimal. The proof technique leverages a generalized Poisson-arrival-see-time-average (PASTA) theorem which, as far as we know, has not been adopted in the related literature before.

- 2) RR-ONE is proved asymptotically optimal among *all* policies with a massive number of terminals. It is shown that the optimum time-average AoI is proportional to the number of terminals asymptotically; the optimum linear scaling factor is $(1/2)$. RR-ONE is proved to achieve the optimum scaling factor. The pure CSMA protocol is however shown to have (at least) a scaling factor of 1; hence its time-average AoI is arbitrarily larger than RR-ONE asymptotically. In addition, the AoI steady-state stationary distribution under RR-ONE is also derived.
- 3) A full-fledged decentralized implementation of RR-ONE is described; it is capable of adapting to dynamic terminal appearances which is essential for decentralized algorithms. Thereby, the only global information required for each terminal is the total number of terminals; this is obtained by a common broadcast message from the central controller.
- 4) Considering scenarios wherein arrival packets are queued and first-come-first-served (FCFS) at terminals without any packet management, e.g., packet dropping, we propose a Lyapunov optimization-based max-AoI-weight policy. Based on simulation results, it outperforms both the pure CSMA scheme wherein terminals get equal transmission probability, and queue-aware CSMA scheme [18] wherein terminals with longer queues are prioritized.

The remainder of this paper is organized as follows. In Section II, the system model is introduced; the problem of AoI minimization is then formulated; for clarity, we present our main results here and detailed proofs and explanations are conveyed in the subsequent sections. In Section III, we show that RR-ONE is the optimal AIR policy. In Section IV, the asymptotic optimality is proved. In Section V, the stationary distribution under RR-ONE is derived. In Section VI, a decentralized protocol is presented. Section VII presents the max-AoI-weight policy without performing packet management. Section VIII presents simulation results. Finally, in Section IX, conclusions are drawn and discussions are made. The proofs of several lemmas are shown in Appendix B

A. Related Work

An AoI optimization problem can be posed as minimizing the time-average AoI at the receiver by controlling the sampling rate at the terminal. All the sampled data packets go through an $M/M/1$ queue as shown in Fig. 1.¹ There is a subtle, in most cases tradeoff, relationship between throughput and AoI: Sampling frequently results in a high throughput and a low sampling delay but may introduce a large queuing delay; on the other hand, sampling at a low rate introduces a

¹The AoI evolution in this paper is based on discrete time slots; whereas the AoI changes continuously in Figs. 1 and 4 for ease of exposition.

large sampling delay, whereas the queuing delay is reduced. Queuing analysis reveals that there exists an optimal sampling rate, assuming the generated packets are queued and the service is FCFS [6]; $M/D/1$ and $D/M/1$ queues are also considered therein.

Since its inception, AoI has received wide research attentions and there have been several extensions. Regarding multiple sources sharing one queue, and hence multiple corresponding AoIs, Yates and Kaul [7], [8] derive the minimum time-average AoI region under $M/M/1$ queuing model and different service disciplines, e.g., FCFS, last-come-first-served (LCFS), LCFS with preemption. The service process can be extended to obey general distributions; in this regard, the average peak-AoI for multiple sources is obtained, and the problem of optimizing update rates is considered by Huang and Modiano [19]. The scheduling problem for multiple servers and a single queue with job replication is considered by Bedewy *et al.* [20]. The AoI performance is shown to be improved by proper packet management, e.g., LCFS with preemption [21] and packet dropping mechanism [22], based on the intuition that the last-arrived packet has the least age. However, considering service interruption, always prioritizing a new packet may result in performance degradation [23]. The optimization of sampling time without considering queuing delay is studied by Sun *et al.* [24]; they show that even without queuing delay the source should wait a certain time before sampling again to minimize time-average AoI due to service time uncertainty.

The study of the multiqueue (source) scheduling problem is the most relevant work to ours [9], [10], [25], [26]. Hsu *et al.* approached this problem in the wireless broadcast channel where the scheduling decisions are centralized; they prove the optimal policy is age-threshold-based. The scheduling problem of multiple sources inside a finite-length transmission frame to minimize AoI is proved NP-hard [10]. Joo and Eryilmaz proposed that the status updates from multiple sources should be synchronized in applications, such as network monitoring and distributed sensing; they develop a drift-based approach to address the issue [11]. The Whittle's index [27] is leveraged by Kadota *et al.* [9] based on a restless multiarmed-bandit formulation; it is shown that an age-greedy policy is optimal in the symmetric case and the Whittle's index is derived for asymmetric cases. The multisource scheduling problem is studied in [26] where multiple sources share one queue.

The major distinction between our formulation and existing work is that we consider the following scenario: 1) status packets arrive at random time slots at terminals and 2) limited information is available for the policy decisions to facilitate decentralized implementation. The considered scenario is justified in massive IoT status update systems: status variation is unpredictable, and hence update packets, which are used to monitor status variation, are randomly generated; transmissions happen in a wireless multiaccess uplink where scheduling decisions are preferably decentralized to avoid overhead explosion. As far as we know, no existing work on AoI optimization has addressed a practical scenario involving both aspects.

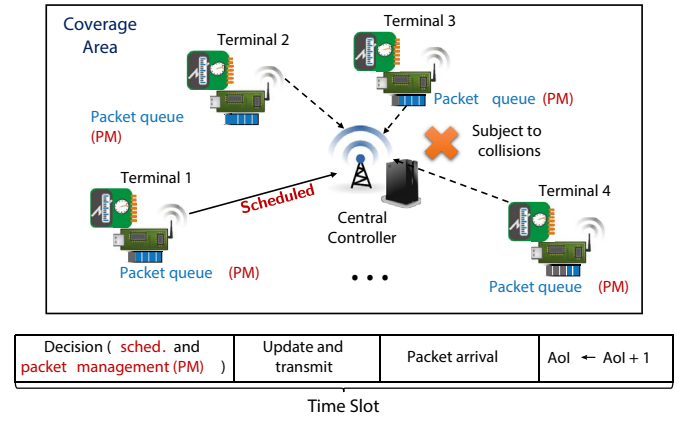


Fig. 2. Considered system architecture and status update procedure.

TABLE I
DESCRIPTION OF KEY NOTATIONS

N :	Number of terminals.
n :	Terminal index.
λ_n :	Status packet arrival rates of terminal- n .
π :	An admissible policy.
$\bar{h}_\pi^{(T,N)}$:	T -horizon time-average AoI of N terminals under policy π .
$U_{n,\pi}(t)$:	Scheduling decision for terminal- n under policy π at time t .
$A_n(t)$:	Age of the packet in terminal- n 's buffer at time t (one-packet buffer).
τ_n :	The time since the last time terminal- n is scheduled.
$\{X_{n,\pi}^{(1)}, X_{n,\pi}^{(2)}, \dots\}$:	The resultant scheduling interval process of terminal- n based on policy π .
m_n :	$\mathbb{E}[X_{n,\pi}^{(k)}] \triangleq m_n, \forall k$.
v_n :	$\mathbb{E}\left[\left(X_{n,\pi}^{(k)}\right)^2\right] \triangleq v_n, \forall k$.

II. SYSTEM MODEL, PROBLEM FORMULATION, AND MAIN RESULTS

Consider a base station (BS), alternatively referred to as a central controller, which is responsible for collecting status update packets from a large number of IoT devices as shown in Fig. 2. A time-slotted system is considered. The status update packets are generated and stored at terminal queues. The queue buffer size for every terminal is assumed to be identical and denote by B . The number of packets generated at time t of terminal n is denoted by $L_n(t)$ and $L_n(t)$ is assumed to be a Bernoulli random variable with parameter λ_n ; the arrival processes $\{L_n(t), t = 1, 2, \dots\}$, $n \in \{1, \dots, N\}$ are independent over terminals and time. The number of terminals is denoted by N . Let $U_{n,\pi}(t)$ denote the scheduling decision of terminal n at time t for a given policy π , i.e., $U_{n,\pi}(t) = 1$ if terminal n is scheduled and $U_{n,\pi}(t) = 0$ otherwise. Key notations used in this paper are presented in Table I.

The T -horizon time-average AoI is denoted by

$$\bar{h}_\pi^{(T,N)} \triangleq \frac{1}{TN} \sum_{t=1}^T \sum_{n=1}^N h_{n,\pi}(t) \quad (1)$$

where the AoI at the t -th time slot for terminal n based on policy π is denoted by $h_{n,\pi}(t)$, and the time horizon is T time

slots. Denote time-average AoI over infinite time horizon as

$$\bar{h}_{\pi}^{(\infty, N)} \triangleq \lim_{T \rightarrow \infty} \bar{h}_{\pi}^{(T, N)}. \quad (2)$$

The evolution of AoI can be written as

$$h_{n,\pi}(t+1) = h_{n,\pi}(t) - U_{n,\pi}(t) \prod_{m \neq n} (1 - U_{m,\pi}(t)) g_{n,\pi}(t) + 1 \quad (3)$$

where $g_{n,\pi}(t)$ denotes the AoI reduction with a successful update from terminal n . Consequently, we have $g_{n,\pi}(t) = 0$ when queue- n is empty at time t . The AoI for each terminal always increases by one after each time slot. Based on this definition (3), whenever a collision happens, i.e., more than one terminals transmit in the same time slot, no status is updated. Note that transmission failures only happen with collisions, otherwise the transmission is always assumed successful; this corresponds to the interference-limited regime which is emerging to be the main application scenario in the future ultradense networks [28], and therein failures due to noise are negligible. In addition, denote the time-average AoI of terminal- n under policy π as

$$\bar{h}_{n,\pi}^{(T)} \triangleq \frac{1}{T} \sum_{t=1}^T h_{n,\pi}(t). \quad (4)$$

The status update procedure is described in Fig. 2. We assume the following sequence of events in each time slot. At the beginning of each time slot, a policy performs scheduling decisions including the following.

- 1) *Terminal Scheduling*: Decide which terminal, or a set of terminals,² updates and transmits in this time slot.
- 2) *Packet Management*: Once a terminal is scheduled, the policy also determines a packet management scheme, i.e., it can choose a packet from its queue to update in the time slot, or drop arbitrary packets. In contrast, packets are queued and served based on an FCFS manner without any packet management. Note that preemption is not considered in this paper, that is, the transmission of a packet cannot be interrupted.

Based on the decision, the scheduled terminal transmits its update packet (assuming one packet is transmitted in each time slot), and thereby the AoI is refreshed at the BS. Note that by this definition no transmission (service) preemption is considered, i.e., a CSMA-type collision avoidance mechanism is applied such that a terminal would not transmit when it senses others are occupying the channel and a terminal does not preempt its own transmission. Afterwards, packets arrive randomly at terminals (the age of newly arrived packets is zero) and then the ages of all packets and all AoIs increase by one. This marks the end of a time slot in our model. The AoI at one time slot is defined as the AoI at the end of the time slot after status update and natural growth.

The objective considered in this paper is to minimize the infinite-horizon time-average AoI (2) over all policies.³ As a

²This case is described only for completeness and not considered in this paper since it results in a collision.

³Hereinafter, we refer to (2) as time-average AoI for simplicity.

first step, the following definition and Lemma 1 (see proof in Appendix B) enable us to only consider work-conserving noncollision (WCNC) policies without loss of optimality.

Definition 2 (WCNC Policy): A WCNC policy is defined as a policy that is not idle when there is at least one packet in terminal queues, nor schedule more than one terminals simultaneously.

Lemma 1: For a non-WCNC policy, there exists at least one WCNC policy that achieves lower AoI.

For practical concerns that the policy decisions should be decentralized, and also mathematical tractability, define AIR policies as follows. Denote the resultant scheduling interval process of terminal- n based on policy π as $X_{n,\pi}^{(k)}$, $k = 1, 2, \dots$ where k is the scheduling interval index. Define $R_{n,\pi}(t)$ as the counting process of scheduling times before time t for terminal n , i.e., $R_{n,\pi}(t) \triangleq \sup\{r : \sum_{k=0}^r X_{n,\pi}^{(k)} \leq t\}$.

Definition 3 (AIR Policy): A policy π is an AIR policy if it is causal and the following conditions are both met.

- 1) The scheduling interval processes $\{X_{n,\pi}^{(k)}, n = 1, \dots, N\}$ are independent of the packet arrival processes at terminals, with finite first and second raw moments denoted by m_n and v_n , respectively.
- 2) The counting processes $R_{n,\pi}(t)$, $n = 1, \dots, N$ are renewal processes.

By definition, the set of AIR policies is essentially a subset of all policies. The condition 1) is in fact reflecting the practical perspective that the scheduling decisions are desired to be independent of the packet arrival processes to enable decentralized implementation and reduce signaling exchange overhead. The condition 2) does enforce an additional constraint that the scheduling intervals are independent identically distributed; however the distributions can be arbitrary as long as they have finite first and second moments. Note that, notwithstanding these conditions, it is found (Theorem 2) that the optimal AIR policy with proper packet management is asymptotically optimal among all policies in the massive IoT regime.

To be clear, we define noncausal policy specifically in this context, and the definition for causal policy follows immediately.

Definition 4 (Noncausal Policy): A policy π that has knowledge of future packet arrival times is defined as non-causal policies.

A. Main Results

The main results of this paper include two aspects, i.e., scheduling policies for scenarios with and without packet management. For the former wherein terminals apply packet management, the AoI performance of RR-ONE and optimality guarantees are analyzed as follows (Theorems 1–3).

Definition 5 (RR-ONE): RR-ONE, denoted by RR in the subscript, is defined as a policy that schedules the n_{RR} -th terminal at each time slot which satisfies

$$n_{RR} = \min \left\{ n : \tau_n = \max_{m=1, \dots, N} \tau_m \right\} \quad (5)$$

and only retains the last-arrival packet at each terminal. If no packet is present at the scheduled terminal, the terminal

transmits a blank packet.⁴ The time since last update from terminal m is denoted by τ_m ; assume $\tau_m = 0, \forall m$ when $t = 0$.

Theorem 1 (Optimality Among AIR Policies): RR-ONE is the optimal AIR policy to minimize the time-average AoI, with

$$\bar{h}_{\text{RR}}^{(\infty, N)} = \frac{1}{N} \sum_{n=1}^N \frac{1}{\lambda_n} + \frac{N-1}{2}. \quad (6)$$

Theorem 2 (Asymptotic Optimality): RR-ONE is asymptotically optimal among all policies (including noncausal policies) in the massive IoT regime, i.e., it achieves the optimum asymptotic scaling factors

$$\lim_{N \rightarrow \infty} \frac{\bar{h}_{\text{RR}}^{(\infty, N)}}{N} = \lim_{N \rightarrow \infty} \frac{\bar{h}_{\text{opt}}^{(\infty, N)}}{N} = \frac{1}{2} \quad \forall \lambda_i \quad (7)$$

$$\lim_{\frac{1}{\lambda_i} \rightarrow \infty} \lambda_i \bar{h}_{\text{RR}}^{(\infty, N)} = \lim_{\frac{1}{\lambda_i} \rightarrow \infty} \lambda_i \bar{h}_{\text{opt}}^{(\infty, N)} = \frac{1}{N} \quad \forall \lambda_{j,j \neq i} \text{ and } N \quad (8)$$

where $\bar{h}_{\text{opt}}^{(\infty, N)}$ denotes the minimum time-average AoI.

Corollary 1 (Optimum Scaling Factor): The minimum time-average AoI is proportional to the number of terminals asymptotically, and the optimum scaling factor is $(1/2)$.

We emphasize that the asymptotic optimality of RR-ONE is among all policies, including policies requiring global information, e.g., terminals' queue lengths, age of all packets, and even noncausal policies which know future packet arrivals (by observing that the proof of Theorem 2 also applies in this case).

Theorem 3 (AoI Stationary Distributions Under RR-ONE): The AoI evolution of terminal- n based on RR-ONE follows a Markov renewal process with a fixed renewal time of N time slots, and the steady-state stationary distribution is

$$\mu_n(j) = \begin{cases} \frac{1-(1-\lambda_n)^j}{N}, & 1 \leq j \leq N \\ \frac{(1-\lambda_n)^{j-N}}{N} (1 - (1-\lambda_n)^N), & j \geq N+1 \end{cases} \quad (9)$$

where $\mu_n(j)$ denotes the probability that the steady state AoI of terminal- n is j .

The steady-state stationary distribution in (9) is instantiated with an insight described in Fig. 3.

On the other hand, in scenarios wherein terminals do not apply packet managements, i.e., packets are served in an FCFS manner, we propose the max-AoI-weight policy (AoI-MW) based on the Lyapunov optimization technique [14].

Definition 6 (AoI-MW): AoI-MW is defined as a policy that schedules the $n_{\text{AoI-MW}}$ -th terminal at each time slot which satisfies

$$n_{\text{AoI-MW}} = \arg \max_{n \in \{1, \dots, N\}} \left\{ 2(h_{n,\pi}(t) + 1)g_{n,\pi}(t) - g_{n,\pi}^2(t) \right\}. \quad (10)$$

If no packet is present at the scheduled terminal, the terminal transmits a blank packet.

⁴Note that we generalize the packet's age process at terminal (left of Fig. 4) in such a way that when there is no packet in the queue, the packet's age continues to grow from the last sent-out packet. By doing so, every time a terminal is scheduled, its AoI at the central controller is updated to the packet's age at the terminal, regardless of whether there is any packet in the terminal's queue. Therefore, RR-ONE satisfies the renewal process requirement of AIR policies.

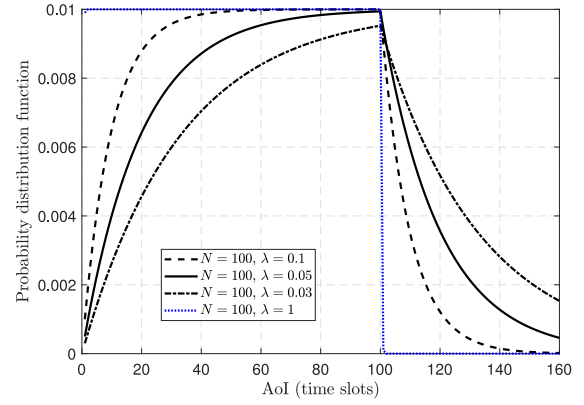


Fig. 3. Steady-state stationary distribution of AoI under RR-ONE. The blue dotted curve represents a uniform distribution on $\{1, \dots, N\}$ when $\lambda = 1$ since in this case the AoI evolves periodically from 1 to N (Lemma 4).

In Sections III–VII, we will prove our main results and elaborate on their implementations and implications.

III. PROOF OF THEOREM 1: OPTIMAL AIR POLICY WITH PACKET MANAGEMENT

The quest for the optimal policy, among all policies with any given N , to minimize the time-average AoI seems elusive, because the problem can be essentially viewed as a restless multiarmed bandit problem with time- and arm-correlated reward functions [29]. Besides, there is a strong probability that the optimal policy requires global information exchange and hence decentralization-unfriendly. Therefore, in this section, we resolve to derive the optimal AIR policy to minimize the time-average AoI in (2) following a generalized PASTA theorem, i.e., the arrival-see-time-average (ASTA) property with a Markov state process as the observed process and an independent outside observer [30]. First, consider the queue evolution of terminal- n based on AIR policies; it is similar with an $M/G/1$ queue given the definition of AIR policies, with a subtle, but important, difference that the service (in this case the service time is the scheduling interval) begins immediately after a packet departure, even if there is no packet waiting in the queue. In the case that there is no packet is in the queue, the service proceeds independently till the end, i.e., scheduled, during which period two possible circumstances can occur: 1) there are (at least one) packet arrivals and thereby one of the packets is updated under a certain packet management policy and 2) there is no packet arrival and consequently no packet is updated. It is clear that under this queue model, the optimal packet management, under arbitrary scheduling policy, is to always update the most up-to-date packet, i.e., the packet that arrives the last; the resultant queue is equivalent to having a buffer size of one and storing only the latest arrival packet. Note that this packet management policy is not necessarily optimal with preemptive service model due to service interruption [31]. Without loss of optimality, we only consider the one-packet buffer packet management policy in the rest of the section.

The age of the packet in queue- n (buffer size is one) is denoted by $A_n(t)$, $t = 1, 2, \dots$, a sample path of which is shown in the left of Fig. 4. Upon a packet arrival, e.g., a_i in

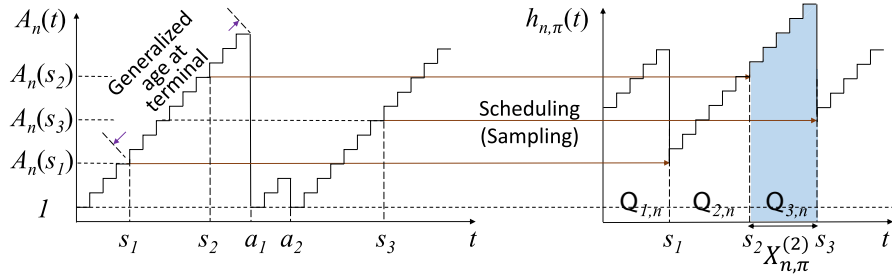


Fig. 4. Age of the packet at terminal- n assuming one packet buffer (left) and AoI at the BS (right), wherein a_i denotes the arrival time of the i th packet at terminal- n , s_i denotes the i th scheduling time of terminal- n , and $A_n(s_i)$ denotes the age of the packet updated at time s_i .

Fig. 4, the age $A_n(t)$ drops to one (measured at the end of the time slot) based on the procedure in Fig. 2. When terminal- n is scheduled at the time of s_i , the AoI at the BS is updated to the age of the packet at terminal n , i.e., $A_n(s_i)$. Note that we prescribe a generalized age of $A_n(s_i)$ that between each update and next packet arrival, e.g., between s_1 and a_1 , $A_n(t)$ equals the AoI of terminal n at the BS although there is no packet in the queue during the time. By doing this, we make $A_n(t)$ evolve *independently* of $h_{n,\pi}(t)$ while not affecting the AoI update procedure; this is crucial for the ASTA property to apply.

Based on the renewal process condition of AIR policies, and following the same arguments in [31], the time-average AoI can be readily calculated by the sum of the geometric areas $Q_{k,n}$ in Fig. 4

$$\begin{aligned} \bar{h}_{n,\pi}^{(\infty,N)} &= \lim_{T \rightarrow \infty} \frac{K}{T} \frac{1}{K} \sum_{k=1}^K Q_{k,n} \\ &= \lim_{T \rightarrow \infty} \frac{K}{T} \lim_{K \rightarrow \infty} \frac{1}{K} \sum_{k=1}^K Q_{k,n} \\ &= \frac{\mathbb{E}[Q_{k,n}]}{m_n} \end{aligned} \quad (11)$$

where K denotes the number of scheduled times until time T (the terminal index is omitted for brevity). When T goes to infinity, K also goes to infinity for reasonable scheduling policies since otherwise it is obvious that the AoI of a terminal with finite scheduling times will go to infinity when T is large enough. The last equality is based on the elementary renewal theorem [32]. It then follows that:

$$\begin{aligned} \bar{h}_{n,\pi}^{(\infty,N)} &= \frac{1}{m_n} \mathbb{E} \left[X_{n,\pi}^{(k)} A_n(s_k) + (X_{n,\pi}^{(k)} - 1) \frac{X_{n,\pi}^{(k)}}{2} \right] \\ &\stackrel{(a)}{=} \frac{1}{m_n} \left(\mathbb{E}[X_{n,\pi}^{(k)}] \mathbb{E}[A_n(s_k)] + \frac{1}{2} (v_n - m_n) \right) \\ &= \mathbb{E}[A_n(s_k)] + \frac{v_n - m_n}{2m_n} \\ &\stackrel{(b)}{\geq} \mathbb{E}[A_n(s_k)] + \frac{m_n - 1}{2} \end{aligned} \quad (12)$$

where the equality (a) is based on the arrival-independent condition of AIR policies, and the inequality (b) follows from $v_n \geq m_n^2$; note that the equality holds when the scheduling interval is a constant m_n .

It is now clear that the main challenge is to calculate $\mathbb{E}[A_n(s_k)]$. First we have Lemma 2 (see proof in Appendix B)

which shows that $\{A_n(t), t = 1, 2, \dots\}$ is a Markov state process and its stationary distribution is given in (13).

Lemma 2: $\{A_n(t), t = 1, 2, \dots\}$ is a Markov state process with the steady-state stationary distribution given as

$$\mu_n(j) = \lambda_n(1 - \lambda_n)^{j-1} \quad (13)$$

where $\mu_n(j)$ denotes the probability that the steady state of terminal n is state j (age of packet at terminal- n equals j).

Then the challenge of calculating $\mathbb{E}[A_n(s_k)]$ is tackled by treating $\mathbb{E}[A_n(s_k)]$ as the average state value of a Markov state process by an independent outside observer. Armed with this, we invoke the ASTA property [30] which can be seen as a generalization of the well-known PASTA theorem to non-Poisson observers.

Lemma 3 [30, Th. 3.14]: Let U be a Markov state process and N be a counting process. Then ASTA holds for the pair (U, N) if U is left-continuous and the pair (U, N) is forward-pointwise independent, i.e., for all $t > 0$, $U(t)$, and $\{N(t+s) - N(s) : s \geq 1\}$ are independent.

Let U be $\{A_n(t), t = 1, 2, \dots\}$, and N in Lemma 3 be the counting process of the number of scheduling times before time t . Then based on the AIR policy conditions, U and N are independent. The continuous condition follows by design of update sequence described in Fig. 2. Therefore, we obtain

$$\mathbb{E}[A_n(s_k)] = \lim_{K \rightarrow \infty} \frac{1}{K} \sum_{k=1}^K A_n(s_k) = \mathbb{E}[A_n(t)] = \frac{1}{\lambda_n}. \quad (14)$$

In other words, the time-average of random sampling (s_k) of the Markov process $\{A_n(t), t = 1, 2, \dots\}$ equals the steady-state average. Combining with (12), the time-average AoI is

$$\begin{aligned} \bar{h}_{n,\pi}^{(\infty,N)} &= \frac{1}{N} \sum_{n=1}^N \bar{h}_{n,\pi}^{(\infty,N)} \\ &\geq \frac{1}{N} \sum_{n=1}^N \left(\mathbb{E}[A_n(s_k)] + \frac{m_n - 1}{2} \right) \\ &= \frac{1}{N} \sum_{n=1}^N \left(\frac{1}{\lambda_n} + \frac{m_n - 1}{2} \right). \end{aligned} \quad (15)$$

The update rate of all terminals equals one packet per time slot for WCNC policies; therefore, according to the elementary renewal theorem

$$\sum_{n=1}^N \frac{1}{m_n} = 1. \quad (16)$$

It follows from the arithmetic-harmonic-mean inequality (equality holds when $m_n = N$, $\forall n = 1, \dots, N$) and (15) that

$$\bar{h}_\pi^{(\infty, N)} \geq \frac{1}{N} \sum_{n=1}^N \frac{1}{\lambda_n} + \frac{N-1}{2}. \quad (17)$$

The equality holds in (17) under two conditions: 1) $m_n = N$, $\forall n = 1, \dots, N$ and 2) the scheduling interval is a constant m_n . These two conditions can be both satisfied with RR-ONE. For a sanity check, RR-ONE is indeed an AIR policy. With this, we can conclude the proof of Theorem 1.

Remark 1: Alert readers may be curious about the optimal policy in general. In particular, since a myopic policy (minimize the AoI in the next time slot) is optimal [9, Th. 1] when we eliminate the randomness of arrival packets ($\lambda = 1$), i.e., the AoI is updated to one (or zero) every time, is it optimal in general? A counter example is given in Appendix A to show that the myopic policy is not optimal even with global state information (GSI), e.g., queue length, age of packets, and arrival rates information, at least with finite horizon. Nevertheless, we conjecture that the myopic policy with GSI is close to optimal with infinite horizon, and it is adopted as a performance benchmark in Section VIII to investigate the value of GSI.

IV. PROOF OF THEOREM 2: ASYMPTOTIC OPTIMALITY OF RR-ONE

In IoT systems, one major challenge is to accommodate a large number of terminals while maintaining timely status updates. Hence, it is of central interest to consider the problem in the asymptotic regime. Toward this end, it will be shown in the following that RR-ONE, given its simple structure, is asymptotically optimal among all policies with arbitrary information and even noncausal packet arrival knowledge. First, we obtain two performance bounds and compare these with the achievable performance by RR-ONE; the conclusion follows by showing that they have identical asymptotic scaling factors.

First, we introduce two lower bounds of the time-average AoI of any policies in Lemma 4 and Lemma 5 (see proof in Appendix B).

Lemma 4: The time-average AoI in (2) cannot be less than $[(N+1)/2]$ for any causal or noncausal policy, i.e.,

$$\bar{h}_\pi^{(\infty, N)} \geq \frac{N+1}{2} \quad \forall N = 1, 2, \dots, \lambda_n \in [0, 1], n \in \{1, \dots, N\}. \quad (18)$$

Lemma 5: The time-average AoI in (1) cannot be less than $(1/N) \sum_{n=1}^N (1/\lambda_n)$ for any causal or noncausal policy, i.e.,

$$\bar{h}_\pi^{(\infty, N)} \geq \frac{1}{N} \sum_{n=1}^N \frac{1}{\lambda_n} \quad \forall N = 1, 2, \dots, \lambda_n \in [0, 1], n \in \{1, \dots, N\}. \quad (19)$$

It follows that the minimum time-average AoI, denoted by $\bar{h}_{\text{opt}}^{(\infty, N)}$, cannot be less than either bound, i.e.,

$$\bar{h}_{\text{opt}}^{(\infty, N)} \geq \max \left[\frac{N+1}{2}, \frac{1}{N} \sum_{n=1}^N \frac{1}{\lambda_n} \right]. \quad (20)$$

After obtaining two lower bounds in Lemmas 4 and 5, combining with the achievable AoI derived in (17), we can prove the asymptotic optimality of RR-ONE; the optimum scaling result follows immediately. Based on Lemmas 4 and 5 and Theorem 2, it follows that $\forall N, \lambda_1, \dots, \lambda_N$:

$$\max \left[\frac{N+1}{2}, \frac{1}{N} \sum_{n=1}^N \frac{1}{\lambda_n} \right] \leq \bar{h}_{\text{opt}}^{(\infty, N)} \leq \frac{1}{N} \sum_{n=1}^N \frac{1}{\lambda_n} + \frac{N-1}{2}. \quad (21)$$

For any fixed λ_n , $n = 1, \dots, N$, divide both sides of (21) by N , and let N goes to infinity, we obtain

$$\lim_{N \rightarrow \infty} \frac{\max \left[\frac{N+1}{2}, \frac{1}{N} \sum_{n=1}^N \frac{1}{\lambda_n} \right]}{N} = \frac{1}{2} \quad \lim_{N \rightarrow \infty} \frac{\frac{1}{N} \sum_{n=1}^N \frac{1}{\lambda_n} + \frac{N-1}{2}}{N} = \frac{1}{2} \quad (22)$$

and therefore (7) follows. The scaling results for RR-ONE follows directly from (34). Similarly $\forall n$

$$\lim_{\frac{1}{\lambda_n} \rightarrow \infty} \frac{\max \left[\frac{N+1}{2}, \frac{1}{N} \sum_{n=1}^N \frac{1}{\lambda_n} \right]}{\frac{1}{\lambda_n}} = \frac{1}{N} \quad \lim_{\frac{1}{\lambda_n} \rightarrow \infty} \frac{\frac{1}{N} \sum_{n=1}^N \frac{1}{\lambda_n} + \frac{N-1}{2}}{\frac{1}{\lambda_n}} = \frac{1}{N} \quad (23)$$

and (8) follows, which concludes the proof of Theorem 2.

Remark 2: Theorem 2 shows that the optimum time-average AoI scales linearly with the number of terminals N and expected interarrival time, i.e., $(1/\lambda_n)$, $\forall n$. The optimum scaling factors are also given. Moreover, we show that RR-ONE not only can achieve linear scaling, but also achieves the optimum scaling factors.

Remark 3: By setting $\lambda_n = 1$, $\forall n$ in Theorem 2 which is equivalent to a scenario wherein the age after every update is always one, it is immediately obvious that RR-ONE is optimal in this setting with arbitrary N .

Corollary 2: The time-average AoI achieved by a uniformly random scheduling policy with one-packet buffers (UN-ONE) is at least

$$\bar{h}_{\text{UN}}^{(\infty, N)} \geq N. \quad (24)$$

Proof: Consider running the UN-ONE policy in system A0 (Lemma 4). Obviously this gives us a lower bound on the UN-ONE performance. In this case, the system state is fully characterized by the AoI of each terminal, and the AoI for each terminal (omitting the terminal index for brevity) evolves as

$$p_{h,h+1} = \left(1 - \frac{1}{N}\right) \quad p_{h,1} = \frac{1}{N} \quad p_{h,i} = 0 \quad \forall i \neq 1, h+1. \quad (25)$$

Note that although the AoI transitions of different terminals are not independent by observing, e.g., only one terminal can be scheduled at each time slot, the time-average AoI in (2) only concerns with the marginal distribution of AoI for each terminal. The AoI transition Markov chain of one terminal is shown in Fig. 5.

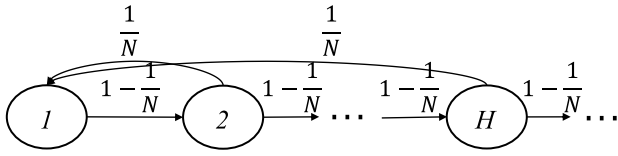


Fig. 5. AoI transition Markov chain under UN-ONE in A0.

Therefore, the steady state AoI for each terminal is exponentially distributed with parameter $(1/N)$. The time-average AoI by running the UN-ONE policy in system A0 is hence N . Therefore, (24) follows immediately. ■

Remark 4: Based on Corollary 2, UN-ONE, which in fact can be seen as a performance lower bound of pure CSMA scheme without considering the contention time overhead, has a much larger time-average AoI compared with RR-ONE. In particular, when the number of terminals grows large, UN-ONE does not achieve the optimum scaling factor and thus is arbitrarily worse than RR-ONE.

V. PROOF OF THEOREM 3: AOI STATIONARY DISTRIBUTION UNDER RR-ONE

Although the time-average AoI under RR-ONE has been derived in Theorem 2 based on the ASTA property, the steady-state stationary distribution of AoI under RR-ONE is still unclear. To address this issue, it is found that the AoI evolution for each terminal follows a Markov renewal process with a fixed renewal interval of N time slots. Therefore, the steady-state stationary distribution can be derived by first studying the embedded Markov chain. Denote the time since last update of the n th terminal as τ_n , it follows that the age of the packet at the n th terminal, i.e., A_n (the time index is omitted for brevity), conditioned on τ_n is distributed as (let $A_n = h_n$ denote there is no packet in the n th queue at the time and thus the age after this update does not change)

$$\begin{aligned} \Pr\{A_n = a | \tau_n = \tau\} &= \lambda_n(1 - \lambda_n)^a, \quad a = 0, \dots, \tau - 1 \\ \Pr\{A_n = h_n | \tau_n = \tau\} &= (1 - \lambda_n)^\tau. \end{aligned} \quad (26)$$

If the terminal- n is scheduled in this time slot, then the AoI of terminal- n , i.e., h_n , is updated to the realization of A_n .

Consider N embedded Markov chains which describe the AoI transition for N respective terminals between successive scheduling based on RR-ONE. The state S of the n th Markov chain (the terminal index is omitted for brevity) is defined as the AoI at the scheduled time slot. The transition probability is therefore

$$\begin{aligned} p_{ss'} &\triangleq \Pr\{S_{k+1} = s' | S_k = s\} \\ &= \begin{cases} \lambda_n(1 - \lambda_n)^{s'-1}, & \text{if } s' \in \{1, \dots, N\} \\ (1 - \lambda_n)^N, & \text{if } s' = s + N \\ 0, & \text{otherwise} \end{cases} \end{aligned} \quad (27)$$

by noticing the fact that the AoI increases by N during successive RR-ONE scheduling and then is updated to a certain value given by (26). If no packet is present at the terminal queue, then the AoI is updated to $s' = s + N$. In the following, the resultant steady-state stationary distribution

of the Markov chain, denoted by $\mu_n(s)$ where $s = 1, 2, \dots$ denotes state value, is derived. It follows that:

$$\mu_n(j) = \sum_{i \in \{1, 2, \dots\}} \mu_n(i) p_{ij}. \quad (28)$$

Since

$$p_{ij} = \lambda_n(1 - \lambda_n)^{j-1} \quad \forall i = \{1, 2, \dots\}, j \in \{1, \dots, N\} \quad (29)$$

the steady-state stationary distribution for the first N states is

$$\mu_n(j) = \lambda(1 - \lambda_n)^{j-1} \quad \forall j \in \{1, \dots, N\}. \quad (30)$$

For the j th state with $j > N$, its previous state must be state $j - N$, and hence

$$\begin{aligned} \mu_n(j) &= \mu_n(j - N)(1 - \lambda_n)^N \\ &= \dots \\ &= \mu_n(l)(1 - \lambda_n)^{mN} \\ &= \lambda_n(1 - \lambda_n)^{j-1} \quad \forall j = mN + l \end{aligned} \quad (31)$$

where in m and l are integers larger or equal to one. Therefore, it has been shown that the steady-state stationary distribution of the Markov chain is a geometric distribution with parameter λ_n .

After addressing the steady state of the embedded Markov chains, we are ready to derive the steady-state stationary distribution of the AoI evolution process $\{Y_n(t), t = 1, 2, \dots\}$ at all time slots. Notice that it is a Markov renewal process with fixed renewal interval N based on RR-ONE. Moreover, the state evolution between renewal (scheduling) is deterministic; the AoI increases by one every time slot. Therefore, the steady-state stationary distribution of $\{Y_n(t), t = 1, 2, \dots\}$ is derived as

$$\mu_n(j) = \sum_{m=1}^{\min[j, N]} q_{n,m,j} = \sum_{m=1}^{\min[j, N]} \frac{1}{N} \lambda_n(1 - \lambda_n)^{j-m} \quad (32)$$

where $q_{n,m,j}$ is the fraction of time that the AoI state transits to state- $(j - m + 1)$ at the scheduled time slot and then reaches state- j before the next scheduling. Therefore

$$j - (j - m + 1) \leq N - 1 \quad (33)$$

such that state- j is within reach, and hence $m \geq N$; this, combining with $m \leq j$, explains the minimum operation in (32). The steady-state stationary distribution is hence given in (9) after some mathematical manipulations. The time-average AoI can be directly derived from this distribution, i.e.,

$$\bar{h}_{RR}^{(\infty, N)} = \frac{1}{N} \sum_{n=1}^N \sum_{j=1}^{\infty} \mu_n(j)j = \frac{1}{N} \sum_{n=1}^N \frac{1}{\lambda_n} + \frac{N-1}{2}. \quad (34)$$

This coincides with (17).

VI. DECENTRALIZED RR-ONE ALGORITHM

A fully decentralized RR-ONE-based scheduling algorithm (DRR) is proposed in this section. The proposed algorithm is described in Algorithm 1, where we assume dynamic terminal appearance. However, we assume at each time slot at most one event can happen: a terminal appears or disappears.

Algorithm 1: DRR

```

1 Initialization:
2 (Terminals) Set  $\gamma_n = n \bmod N$ ,  $w_n = N$ .
3 (BS) Set  $N$  to the number of initial terminals and  $W = 1$ .
4 (Newly appeared terminals) Set  $\gamma_n = 0$ ,  $w_n = 1$ .
5 At each terminal:
6 if Packet arrives then
7   Replace the current queued packet with the new one.
8 if  $\gamma_n = 0$  then
9   Transmit the queued packet (a blank packet if none).
10  Set  $\gamma_n \leftarrow w_n$ .
11 else
12   Keep silent in this time slot.
13 At the BS, after receiving updates:
14 if Successful update or a blank update then
15   Send an ACK.
16 else if Receive nothing then
17   Send a NACK.
18 else
19   (Collision) Set  $N \leftarrow N + 1$ . Send a packet indicating
20   a collision, containing information of  $N$  and  $W$ .
21 Set  $W \leftarrow (W - 1) \bmod N$ .
22 After receiving feedback at each terminal:
23 if Collision then
24   if Terminal is newly appeared then
25      $w_n \leftarrow N$ ,  $\gamma_n \leftarrow W$ .  $\gamma_n \leftarrow \gamma_n - 1$ .
26   else
27      $w_n \leftarrow N$ ,  $\gamma_n \leftarrow N$ .  $\gamma_n \leftarrow \gamma_n - 1$ .
28 else if NACK then
29    $w_n \leftarrow w_n - 1$ .  $\gamma_n \leftarrow \gamma_n - 1$ .
30 else
31   ACK received.  $\gamma_n \leftarrow \gamma_n - 1$ .
32 Return to Step 5.

```

The essence of DRR can be summarized as follows. The system always runs a round-robin status update protocol by assigning each terminal a unique time slot (γ_n) to update and rotating among terminals. Without new terminal appearances or disappearances, the system runs collision-free and every time slot is utilized. The BS feeds an ACK back in this case. Terminals dynamically appear at or disappear from the system. With a new terminal appearance, it updates immediately by design, and causing a collision inevitably since previously all time slots are utilized. The BS then feeds back a common message indicating a collision, with also the information about the current number of terminals (including the newly appeared), i.e., N , and the current spot of rotation, i.e., W . The new terminal will occupy the newly created time slot at the end of the rotation and the collided time slot still belongs to its original owner, and therefore no collision will happen between the two terminals in the next round. With a terminal (T0) disappearance, the BS receives nothing in its time slot. Note that

a terminal that does not have any packet to update when it is scheduled would transmit a special blank packet such that the BS can distinguish between terminal disappearance and no packet to update. When T0 disappears, the BS then feeds back an NACK. Every terminal in the system then subtracts its record of the number of terminals by one and the next-in-line terminal (T1) will occupy T0's spot in the next round.

VII. MAX-AOI-WEIGHT POLICY FOR SCHEDULING WITHOUT PACKET MANAGEMENT

Without packet management, the status packets are assumed to be queued with infinite buffers at terminals before transmissions and the service is based on FCFS discipline in this paper. Therefore, all generated packets are eventually transmitted and updated to the BS. This assumption is reasonable in scenarios where not only the latest status is important, but also the BS is interested in keeping all the status data, and their status evolution processes, for analytic purposes. Another reasonable scenario is that terminals cannot apply packet management due to hardware limitations.

Note that the ASTA property does not apply in this case, due to the fact that the age of the head-of-line packet at each terminal changes to the next-in-line packet's age when the terminal is scheduled. Therefore, the independence property does not hold in Lemma 3; this presents a difficulty in analyzing the time-average AoI explicitly. Therefore, we resolve to the Lyapunov optimization technique [14] to derive AoI-MW by minimizing the drift of a Lyapunov function. The quadratic Lyapunov function is adopted, i.e.,

$$L(\mathbf{h}_\pi(t)) \triangleq \frac{1}{N} \sum_{n=1}^N h_{n,\pi}(t)^2 \quad (35)$$

where $\mathbf{h}_\pi(t) \triangleq [h_{1,\pi}(t), \dots, h_{N,\pi}(t)]^T$, and the Lyapunov drift function is, hence,

$$\Delta(\mathbf{h}_\pi(t)) \triangleq \mathbb{E}[L(\mathbf{h}_\pi(t+1)) - L(\mathbf{h}_\pi(t)) | \mathbf{h}_\pi(t)]. \quad (36)$$

The AoI dynamics defined in (3) is rewritten as

$$h_{n,\pi}(t+1) = h_{n,\pi}(t) - U_{n,\pi}(t)g_{n,\pi}(t) + 1 \quad (37)$$

with $\sum_{n=1}^N U_{n,\pi}(t) \leq 1$, and $g_{n,\pi}(t)$ equals the age difference, or the interarrival time (at buffer of terminal- n), between the last-received status packet at destination for terminal- n and the head-of-line packet in this time slot; as stated before, in case of there is no packet in the buffer of the scheduled terminal, $g_{n,\pi}(t) = 0$. It follows that:

$$\begin{aligned} & \mathbb{E}[h_{n,\pi}(t+1)^2 - h_{n,\pi}(t)^2 | \mathbf{h}_{n,\pi}(t)] \\ &= -\mathbb{E}[U_{n,\pi}(t) | \mathbf{h}_{n,\pi}(t)] G_{n,\pi}(t) + 2h_{n,\pi}(t) + 1 \end{aligned} \quad (38)$$

where $G_{n,\pi}(t) \triangleq 2(h_{n,\pi}(t) + 1)g_{n,\pi}(t) - g_{n,\pi}^2(t)$. Then the drift can be written as

$$\begin{aligned} \Delta(\mathbf{h}_\pi(t)) &= -\frac{1}{N} \sum_{n=1}^N \mathbb{E}[U_{n,\pi}(t) | \mathbf{h}_{n,\pi}(t)] G_{n,\pi}(t) \\ &\quad + \frac{1}{N} \sum_{n=1}^N [2h_{n,\pi}(t) + 1]. \end{aligned} \quad (39)$$

AoI-MW should minimize the Lyapunov drift at any time slot such that the Lyapunov function is minimized in the long run [14]. Observe that only the first term in (39) concerns with the scheduling action, and hence the AoI-MW policy is defined as at each time slot

$$n_{\text{AoI-MW}} = \arg \max_{n \in \{1, \dots, N\}} \left\{ 2(h_{n,\pi}(t) + 1)g_{n,\pi}(t) - g_{n,\pi}^2(t) \right\} \quad (40)$$

with ties broken arbitrarily. The decentralized implementation of AoI-MW can be based on the queue-aware CSMA scheme [18], and replacing the queue weights by the maximization term in (40). Note that the Lyapunov drift framework can incorporate arbitrary linear terminal weights (denoted by w_n) and independent identically distributed transmission error (error probability denoted by $p_{e,n}$) naturally by multiplying the maximization term in (40) by $w_n(1-p_{e,n})$ [33].

Remark 5 (Performance of AoI-MW): The performance analysis for max-weight type policies usually follow the standard approach that proves its performance advantage over the optimal randomized policy [14] which can achieve throughput-optimality under mild conditions. However, in the AoI case the optimal randomized policy is found to be loosely connected to the optimal AoI scheduling [33], leading to loose AoI bounds that sometimes are even useless given the fact the performance of the derived Lyapunov-drift-based policy is very close to optimum revealed by simulations [33]. Therefore, we evaluate the AoI-MW performance based on simulations in Section VIII (Fig. 10).

VIII. SIMULATION RESULTS

In this section, computer simulation-based experiments are conducted to evaluate the AoI performance of scheduling policies. The optimum performance is obtained numerically by formulating the problem as an Markov decision process (MDP) and solving it by relative value iterations for average cost function [34]. Note that, similar with most practical applications, the MDP-based approach suffers from the curse of dimensionality and hence only small-scale problems can be solved thereby. Specifically, it is observed that the state space size grows exponentially with the number of terminals, and hence the scalability is significantly limited. Nevertheless, we obtain the minimum time-average AoI of a 2-terminal case and compare its performance with RR-ONE. An finite-state approximation is made for the MDP which originally has infinite state space; note that the AoI can grow to infinity. However, the optimality is intact by arguing that the optimal policy given by solving the finite state MDP does not allow the AoI grows to our prescribed AoI limit. The state space of the MDP is defined as

$$(h_1, a_1) \times (h_2, a_2) \quad (41)$$

where h_i denotes the AoI at the BS for terminal i , a_i denotes the age of the packet at terminal i (assuming the terminal adopts the one-packet buffer packet management policy), and $1 \leq h_i, a_i \leq h_{\max}$, $i = 1, 2$, where h_{\max} is the age limit. The transition probability matrix follows straightforwardly; it is omitted here for brevity, along with the relative value iteration procedure which is well known. The performance of RR-ONE

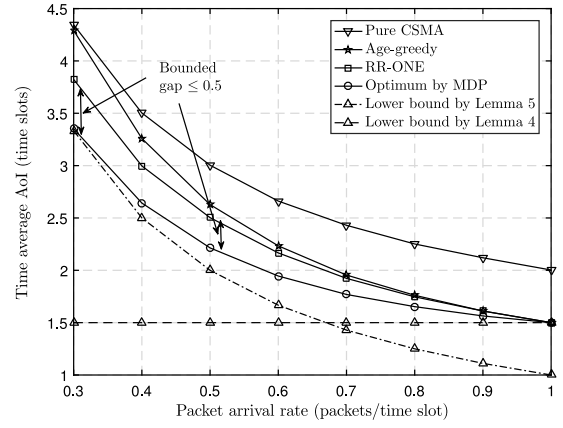


Fig. 6. Performance comparisons among lower bounds in Lemmas 4 and 5, MDP-based optimum, pure-CSMA, age-greedy policy, and RR-ONE. There are two terminals with identical packet arrival rate (x-axis).

is obtained by running RR-ONE for 10^5 time slots and calculating the time-average AoI. In addition, we also simulate the pure CSMA which schedules a terminal uniformly random at each time slot, and an age-greedy policy which chooses the terminal with the largest AoI. The age-greedy policy is found optimal without considering random packet arrivals [9].

It is observed from Fig. 6 that the performance gap between RR-ONE and the optimum given by numerically solving the MDP is larger with lower packet arrival rates; on the other hand, RR-ONE achieves the optimum when λ approaches one based on Remark 3. Since RR-ONE is proved optimal among AIR policies, the optimal scheduling policy with low packet arrival rates must be a non-AIR policy. Specifically, the following intuition explains this. Suppose that the probability of both terminals having arrival packets in the same time slot is negligible when arrival rates are sufficiently low; then the optimal policy is immediately obvious that it should schedule the terminal with a packet arrival at each time slot; note that this policy is not an AIR policy because the scheduling decision depends on packet arrivals which violates condition 1) of AIR policy definition. The optimum performance in this case is also obvious; it should be the same with what is shown in Lemma 5, i.e., completely determined by the interarrival time of packets and this can be observed from Fig. 6. In our recent work [35], a Whittle's index [36] policy which accounts for the heterogeneity of arrival rates and thus with better performance is derived, whereas at the cost of losing the explicit AoI expressions and simple decentralized implementation. Nevertheless, it is noted that the performance gap is bounded (within 0.5 time slots) in this 2-terminal case by observing the RR-ONE performance and performance bound in Lemma 5. The arrival rates in Figs. 6 and 7 are no less than 0.3 due to the curse of dimensionality of MDP as mentioned before. When the arrival rates are too low, h_{\max} can be so large that the MDP state space is beyond the memory size allowed by MATLAB.

Fig. 7 shows the performance with heterogeneous packet arrival rates for terminals; the arrival rate λ_1 is fixed to 0.5 packets per time slot and λ_2 varies from 0.3 to 1. The bounded gap is still within 0.5 time slots, despite the fact that RR-ONE disregards the heterogeneity of arrival rates completely.

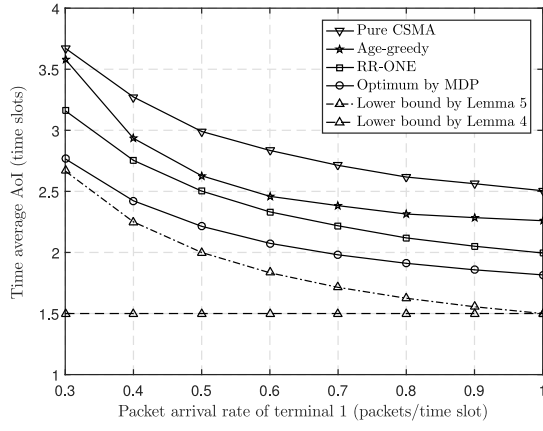


Fig. 7. Performance comparisons with heterogeneous arrival rates. There are two terminals; $\lambda_2 = 0.5$ and λ_1 is shown as the x -axis.

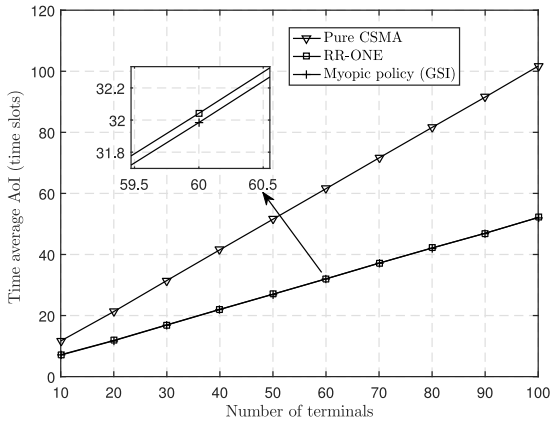


Fig. 8. Performance comparisons with a large number of terminals; the arrival rates are uniformly randomly generated from $[0, 1]$.

Nonetheless, it is observable that the gap between optimum and RR-ONE is larger compared with Fig. 6. Moreover, the gap between RR-ONE and the age-greedy policy is relatively larger when the arrival rates difference between terminals increases, showing that the age-greedy is more sensitive to arrival statistics heterogeneity.

We increase the number of terminals and enter the massive IoT regime in Fig. 8. The MDP-based optimal solution is computationally intractable in this regime and hence we adopt the myopic policy with GSI as an approximation of the optimum. The myopic policy with GSI leverages all the global information (though no future knowledge) to make a scheduling decision that minimizes the one-step expected AoI cost in the MDP formulation; by comparing it with RR-ONE helps us to understand how much GSI benefits RR-ONE. Based on Fig. 8, it is shown that the myopic policy with GSI outperforms RR-ONE only slightly, due to the reason that the packet management of using one-packet buffers eliminates most of the randomness of packet arrivals; most packets are dropped by packet management due to staleness and hence their randomness has no effect. The performance of pure CSMA is also shown; it has been proved in Corollary 2 that its linear scaling factor is (at least) 1 compared with $1/2$ for RR-ONE; this can be observed in the figure.

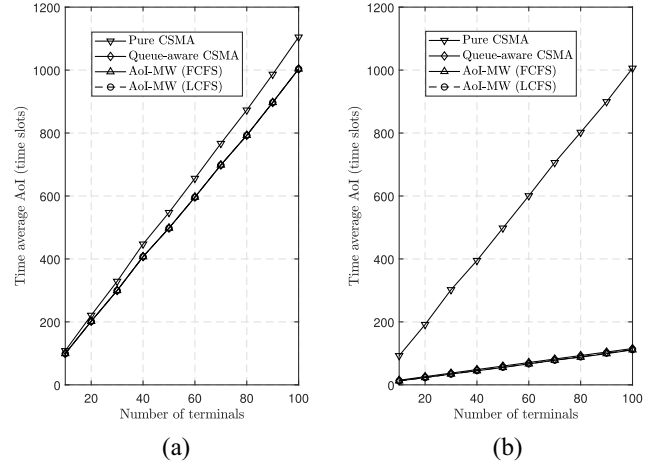


Fig. 9. Performance comparisons with a large number of terminals and FCFS or LCFS service disciplines; the arrival rates are identical for all terminals, and $\lambda = 0.1/N$ (left), $\lambda = 0.1/N$ (right).


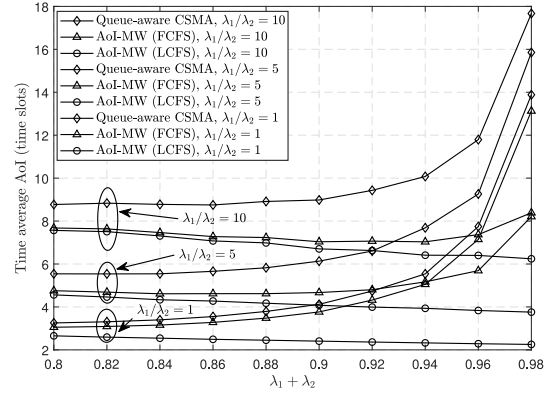


Fig. 10. Performance comparisons between queue-aware CSMA and AoI-MW for two terminals with different arrival rates.

In Figs. 9 and 10, policies without packet management are simulated. The arrival packets are queued at terminals and all arrived packets have to be delivered to the BS. We compare our proposed AoI-MW with pure CSMA (every terminal with equal transmission probability) and queue-aware CSMA [18] (terminals are prioritized based on their queue lengths). The AoI-MW scheme is implemented as follows. The weight of each terminal is given by (40); based on the queue-CSMA scheme proposed in [18], AoI-MW is implemented by replacing the weight of queue-length [18] with (40). The frame structure is shown here.

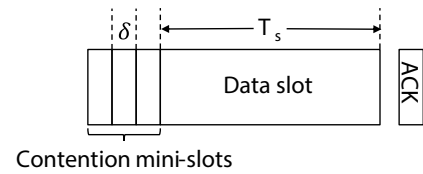

In the contention mini-slots, each of which has a length of $\delta = (1/10)T_s$ where T_s is the length of a data slot, all terminals participate in the p -CSMA random access wherein the transmission probability of each terminal is determined by the scheduling policies and the mapping functions derived in [18].

The terminals that are elected by the contention transmit in the data slot; note that collisions can also happen due to multiple terminals elected at the same time, in which case the transmissions fail. The length of one time slot is the combination of contention mini-slots and one data slot.

Fig. 9 shows that when packet arrival rates of terminals are identical, queue-aware CSMA and AoI-MW achieve similar AoI performance, while pure CSMA performs much worse since it is oblivious to the instantaneous age of packets in the queues. Note that even the pure CSMA can achieve stability in this case with identical arrival rates, however in terms of AoI, the AoI awareness (queue-aware CSMA can be considered as semi-AoI-aware since the queue length can approximate AoI) is very important. Furthermore, we identify the advantage of AoI-MW over queue-aware CSMA in scenarios with nonidentical arrival rates in Fig. 10; for ease of exposition, we consider a case with two terminals. It is observed that when the traffic load is high, i.e., $\lambda_1 + \lambda_2 \rightarrow 1$, and the arrival rates difference between two terminals is large, the performance gap between AoI-MW and queue-aware CSMA is evident. This is because the queue length can no longer approximate the AoI well in the regime. It is also observed that LCFS outperforms FCFS, and the advantage of LCFS over FCFS is more evident in the high traffic load regime, wherein packet queuing delay is high and the LCFS benefits from serving the freshest packet first; while in the low traffic load regime, there is hardly any queuing and hence LCFS and FCFS result in similar performance.

IX. CONCLUSION

In this paper, it is found that with a number of terminals sharing a common wireless uplink based on a collision model and random packet arrivals at each terminal, the optimal AIR policy to minimize the time-average AoI is RR-ONE, i.e., scheduling terminals in a round-robin fashion and each terminal only retains the most up-to-date packet. In the asymptotic regime where the number of terminals is large, the optimum (among all policies) time-average AoI is proved to scale linearly with the number of terminals with the optimum scaling factor of $(1/2)$, and RR-ONE achieves the optimum asymptotically. The steady-state stationary distribution of the AoI of each terminal under RR-ONE was also derived. In addition to establishing the optimality, we proposed a full-fledged decentralized algorithm to implement RR-ONE which accounts for dynamic terminal appearances. Considering the scenario where the entire procedure of status variation is important, i.e., packets cannot be dropped, we proposed AoI-MW based on the Lyapunov optimization technique; its AoI performance was shown to be better than that of pure CSMA in all scenarios, and also better than queue-aware CSMA scheme in scenarios with distinct packet arrival rates.

Despite its asymptotic optimality, RR-ONE's performance in the nonasymptotic regime, especially when λN remains a constant, is suboptimal. Future work should consider further improvements. In addition, it is still unclear how to obtain the closed-form time-average AoI for policies with nonrenewal update intervals.

APPENDIX A MYOPIC POLICY WITH GSI IS NOT OPTIMAL WITH FINITE HORIZON

In this section, we assume that the BS knows the current ages of packets of all terminals and the arrival distributions, i.e., λ_i , $i \in \{1, \dots, N\}$ to make a centralized scheduling decision. In this case, it will be shown the myopic policy is not optimal by constructing a counter example. Consider a case with a time horizon $T = 2$, and the number of terminals is $N = 2$. The arrival rates for terminal 1 and 2 are $\lambda_1 = \delta$ and $\lambda_2 = 1 - \delta$, respectively, and $0 < \delta < 1$. The initial ages are set as $h_i(0)$, $i = 1, 2$, and the initial age gains of the packets in the queues are $g_i(0)$, $i = 1, 2$. Assuming the following conditions are met:

$$\frac{g_2(0)}{2} < g_1(0) < g_2(0) \quad (42)$$

$$h_2(0) - g_2(0) > h_1(0) \quad (43)$$

then the expected average age under the myopic policy, which always schedules the terminal with the largest $g_n(t)$ at time t , is shown here

$$\begin{aligned} & \frac{1}{4}(h_{1,\text{mo}}(1) + h_{1,\text{mo}}(2) + h_{2,\text{mo}}(1) + h_{2,\text{mo}}(2)) \\ &= C - \frac{1}{4} \left(g_2(0) + \delta(1 - \delta)(h_2(0) + 1) + \delta^2(g_2(0) \right. \\ & \quad \left. + h_1(0) + 1) + \delta(1 - \delta)(g_1(0) + g_2(0)) \right. \\ & \quad \left. + (1 - \delta)^2(h_2(0) + 1) \right) \\ &= C - \frac{1}{4} \left(g_2(0) + h_2(0) + 1 + \delta(g_1(0) - g_2(0)) \right. \\ & \quad \left. + \delta^2(h_1(0) + 1 - g_1(0)) \right) \end{aligned} \quad (44)$$

and the expected average age under the optimal policy, which is not hard to figure out in this simple case, is

$$\begin{aligned} & \frac{1}{4}(h_{1,*}(1) + h_{1,*}(2) + h_{2,*}(1) + h_{2,*}(2)) \\ &= C - \frac{1}{4} \left(g_1(0) + \delta(1 - \delta)(g_1(0) + h_2(0) + 1) \right. \\ & \quad \left. + \delta^2(g_1(0) + g_2(0)) + \delta(1 - \delta)(g_1(0) + g_2(0)) \right. \\ & \quad \left. + (1 - \delta)^2(g_1(0) + h_2(0) + 1) \right) \\ &= C - \frac{1}{4} (2g_1(0) + h_2(0) + 1 - \delta(h_2(0) + 1 - g_2(0))) \end{aligned} \quad (45)$$

where

$$C = \frac{1}{2}(h_1(0) + h_2(0)) + 1.5. \quad (46)$$

By setting the parameter δ sufficiently small, we can see that the average age of the myopic policy is strictly smaller than the optimal policy which schedules terminal 1 at the first time slot although the current myopic choice is terminal 2.

APPENDIX B PROOF OF LEMMAS

Proof of Lemma 1: It is straightforward that the performance of a non-WCNC policy is stochastically dominated by a WCNC policy which is identical to the non-WCNC

policy, except that the WCNC policy schedules an arbitrary terminal (resp. schedules one of the terminals) when the non-WCNC policy is idle (resp. schedules multiple terminals resulting in collisions). ■

Proof of Lemma 2: At each time slot, the probability of a packet arrival is λ and therein the age decreases to one; otherwise, with probability $1 - \lambda$, the age increases by one. The Markovian property holds obviously. The steady-state stationary distribution is hence a geometric distribution with parameter λ . ■

Proof of Lemma 4: Consider a system A0 wherein the AoI after each update is fixed to one, instead of determined by the random arrival packets. Then for any scheduling policy π , we have

$$\bar{h}_{\pi}^{(T,N)} \geq \bar{h}_{\pi,A0}^{(T,N)} \quad (47)$$

where $\bar{h}_{\pi,A0}^{(T,N)}$ denotes the time-average AoI of policy π in system A0. The proof for (47) is simply based on stochastic dominance, and currently omitted for brevity. By [9, Th. 1], the optimal policy in A0 is the age-greedy policy by noticing that no asymmetric transmission failure or weights are considered in this paper. Therefore, it is straightforward to derive the optimum time-average AoI in A0 since no randomness exists. The optimum AoI in A0 is therefore

$$\bar{h}_{\text{opt},A0}^{(\infty,N)} = \frac{N+1}{2}. \quad (48)$$

It is sufficient to consider the optimal scheduling scheme in A0 to obtain an AoI lower bound since all scheduling schemes perform better in A0 compared with a system with random packet arrivals. The conclusion follows immediately.

The proof also applies to noncausal policies, by noticing that the future knowledge of packet arrival times would not benefit the policy performance in A0 since the packet arrivals in A0 are deterministic, i.e., $\lambda_i = 1, \forall i$. ■

Proof of Lemma 5: To prove this result, we consider a collision-free system A1 wherein the uplink transmissions can be multiplexed, i.e., an arbitrary number of terminals can update successfully in the same time slot. It is obvious that, similar with Lemma 4, for any policy π

$$\bar{h}_{\pi}^{(T,N)} \geq \bar{h}_{\pi,A1}^{(T,N)}. \quad (49)$$


It is also obvious that the time-average AoI in system A1 is the time-average packet interarrival time at terminal queues. Therefore, the conclusion follows immediately.

The proof also applies to noncausal policies, by noticing that the future knowledge of packet arrival times would not benefit the policy performance in A1 since all the terminals are scheduled in A1, regardless of packet arrival times. ■

REFERENCES

- [1] Z. Jiang, B. Krishnamachari, X. Zheng, S. Zhou, and Z. Niu, "Decentralized status update for age-of-information optimization in wireless multiaccess channels," in *Proc. IEEE Int. Symp. Inf. Theory*, 2018, pp. 1–8.
- [2] "Cellular networks for massive IoT," Ericsson, Stockholm, Sweden, White Paper, Jan. 2016.
- [3] A. Osseiran *et al.*, "Scenarios for 5G mobile and wireless communications: The vision of the METIS project," *IEEE Commun. Mag.*, vol. 52, no. 5, pp. 26–35, May 2014.
- [4] G. P. Fettweis, "The Tactile Internet: Applications and challenges," *IEEE Veh. Technol. Mag.*, vol. 9, no. 1, pp. 64–70, Mar. 2014.
- [5] S. Kaul, M. Gruteser, V. Rai, and J. Kenney, "Minimizing age of information in vehicular networks," in *Proc. IEEE SECON*, Jun. 2011, pp. 350–358.
- [6] S. Kaul, R. Yates, and M. Gruteser, "Real-time status: How often should one update?," in *Proc. IEEE INFOCOM*, Mar. 2012, pp. 2731–2735.
- [7] R. D. Yates and S. Kaul, "Real-time status updating: Multiple sources," in *Proc. IEEE Int. Symp. Inf. Theory*, Jul. 2012, pp. 2666–2670.
- [8] R. D. Yates and S. K. Kaul, "The age of information: Real-time status updating by multiple sources," *IEEE Trans. Inf. Theory*, to be published.
- [9] I. Kadota, E. Uysal-Biyikoglu, R. Singh, and E. Modiano, "Minimizing the age of information in broadcast wireless networks," in *Proc. Annu. Allerton Conf. Commun. Control Comput.*, Sep. 2016, pp. 844–851.
- [10] Q. He, D. Yuan, and A. Ephremides, "Optimal link scheduling for age minimization in wireless systems," *IEEE Trans. Inf. Theory*, vol. 64, no. 7, pp. 5381–5394, Jul. 2018.
- [11] C. Joo and A. Eryilmaz, "Wireless scheduling for information freshness and synchrony: Drift-based design and heavy-traffic analysis," in *Proc. IEEE WiOpt*, May 2017, pp. 1–8.
- [12] N. Pappas, J. Gunnarsson, L. Kratz, M. Kountouris, and V. Angelakis, "Age of information of multiple sources with queue management," in *Proc. IEEE Int. Conf. Commun. (ICC)*, Jun. 2015, pp. 5935–5940.
- [13] Z. Jiang, S. Zhou, X. Guo, and Z. Niu, "Task replication for deadline-constrained vehicular cloud computing: Optimal policy, performance analysis and implications on road traffic," *IEEE Internet Things J.*, vol. 5, no. 1, pp. 93–107, Feb. 2018.
- [14] M. J. Neely, "Stochastic network optimization with application to communication and queueing systems," in *Synthesis Lectures on Communication Networks*, vol. 3. San Rafael, CA, USA: Morgan & Claypool, 2010, pp. 1–211.
- [15] Y. Sun and B. Cyr, "Information aging through queues: A mutual information perspective," in *Proc. IEEE SPAWC Conf.*, 2018, pp. 1–5.
- [16] R. D. Yates, "The age of information in networks: Moments, distributions, and sampling," *arXiv preprint arXiv:1806.03487*, 2018.
- [17] G. Bianchi, "Performance analysis of the IEEE 802.11 distributed coordination function," *IEEE J. Sel. Areas Commun.*, vol. 18, no. 3, pp. 535–547, Mar. 2000.
- [18] J. Ni, B. Tan, and R. Srikant, "Q-CSMA: Queue-length-based CSMA/CA algorithms for achieving maximum throughput and low delay in wireless networks," *IEEE/ACM Trans. Netw.*, vol. 20, no. 3, pp. 825–836, Jun. 2012.
- [19] L. Huang and E. Modiano, "Optimizing age-of-information in a multi-class queueing system," in *Proc. IEEE Int. Symp. Inf. Theory*, Jun. 2015, pp. 1681–1685.
- [20] A. M. Bedewy, Y. Sun, and N. B. Shroff, "Optimizing data freshness, throughput, and delay in multi-server information-update systems," in *Proc. IEEE Int. Symp. Inf. Theory*, Jul. 2016, pp. 2569–2573.
- [21] S. K. Kaul, R. D. Yates, and M. Gruteser, "Status updates through queues," in *Proc. Annu. Conf. Inf. Sci. Syst.*, Mar. 2012, pp. 1–6.
- [22] M. Costa, M. Codreanu, and A. Ephremides, "On the age of information in status update systems with packet management," *IEEE Trans. Inf. Theory*, vol. 62, no. 4, pp. 1897–1910, Apr. 2016.
- [23] E. Najm and R. Nasser, "The age of information: The gamma awakening," in *Proc. IEEE Int. Symp. Inf. Theory*, 2016, pp. 2574–2578.
- [24] Y. Sun, E. Uysal-Biyikoglu, R. Yates, C. E. Koksal, and N. B. Shroff, "Update or wait: How to keep your data fresh," in *Proc. IEEE INFOCOM*, Apr. 2016, pp. 1–9.
- [25] Y.-P. Hsu, E. Modiano, and L. Duan, "Age of information: Design and analysis of optimal scheduling algorithms," in *Proc. IEEE Int. Symp. Info. Theory*, Jun. 2017, pp. 561–565.
- [26] A. M. Bedewy, Y. Sun, S. Kompella, and N. B. Shroff, "Age-optimal sampling and transmission scheduling in multi-source systems," *arXiv preprint arXiv:1812.09463*, 2018.
- [27] W. Whitt, "Minimizing delays in the GI/G/1 queue," *Oper. Res.*, vol. 32, no. 1, pp. 41–51, 1984.
- [28] J. Andrews *et al.*, "What will 5G be?," *IEEE J. Sel. Areas Commun.*, vol. 32, no. 6, pp. 1065–1082, Jun. 2014.
- [29] S. H. A. Ahmad, M. Liu, T. Javidi, Q. Zhao, and B. Krishnamachari, "Optimality of myopic sensing in multichannel opportunistic access," *IEEE Trans. Inf. Theory*, vol. 55, no. 9, pp. 4040–4050, Sep. 2009.
- [30] B. Melamed and D. Yao, "The ASTA property," in *Advances in Queueing: Theory, Methods and Open Problems*. Boca Raton, FL, USA: CRC Press, 1995, pp. 195–224.
- [31] E. Najm, R. Yates, and E. Soljanin, "Status updates through M/G/1/1 queues with HARQ," in *Proc. IEEE Int. Symp. Inf. Theory*, Jun. 2017, pp. 131–135.

- [32] D. R. Cox, *Renewal Theory*, vol. 1. London, U.K.: Methuen, 1967.
- [33] I. Kadota, A. Sinha, E. Uysal-Biyikoglu, R. Singh, and E. Modiano, "Scheduling policies for minimizing age of information in broadcast wireless networks," *IEEE/ACM Trans. Netw.*, vol. 26, no. 6, pp. 2637–2650, Dec. 2018.
- [34] D. P. Bertsekas, *Dynamic Programming and Optimal Control*, vol. 1. Belmont, MA, USA: Athena Sci., 1995.
- [35] Z. Jiang, B. Krishnamachari, S. Zhou, and Z. Niu, "Can decentralized status update achieve universally near-optimal age-of-information in wireless multiaccess channels?" in *Proc. Int. Teletraffic Congr. (ITC)*, Sep. 2018, pp. 1–9.
- [36] R. R. Weber and G. Weiss, "On an index policy for restless bandits," *J. Appl. Probab.*, vol. 27, no. 3, pp. 637–648, 1990.



Zhiyuan Jiang received the B.E. and Ph.D. degrees from the Electronic Engineering Department, Tsinghua University, Beijing, China, in 2010 and 2015, respectively.

He is currently an Associate Professor with the School of Communication and Information Engineering, Shanghai University, Shanghai, China. He visited the University of Southern California, Los Angeles, CA, USA, from 2013 to 2014 and from 2017 to 2018. He was an experienced Researcher and a Wireless Signal Processing

Scientist with Ericsson, Stockholm, Sweden, and Intel Labs, Portland, OR, USA, from 2015 to 2016 and in 2018, respectively. His current research interests include sequential decision making in wireless networks and the design and implementation of multi-antenna systems.



Bhaskar Krishnamachari (M'02–SM'14) received the B.E. degree in electrical engineering from Cooper Union, New York, NY, USA, in 1998, and the M.S. and Ph.D. degrees in electrical engineering from Cornell University, Ithaca, NY, USA, in 1999 and 2002, respectively.

He is a Ming Hsieh Faculty Fellow and a Professor of electrical engineering and computer science with the Viterbi School of Engineering, University of Southern California, Los Angeles, CA, USA, where he is the Director of the USC Viterbi

Center for Cyber-Physical Systems and the Internet of Things. He authored *Networking Wireless Sensors* (Cambridge Univ. Press, 2005). His current research interests include design, analysis, implementation, and empirical evaluation of algorithms and protocols for next-generation wireless networks, including for the Internet of Things.

Dr. Krishnamachari was a recipient of the NSF CAREER Award, the ASEE Terman Award, and several Best Paper Awards, including at IPSN and Mobicom. He serves as an Editor for the IEEE/ACM TRANSACTIONS ON NETWORKING.



Xi Zheng received the B.S. degree in physics from Tsinghua University, Beijing, China, in 2014, where she is currently pursuing the Ph.D. degree in electronic engineering.

Her current research interests include resource management in wireless networks and green wireless communications.



Sheng Zhou received the B.E. and Ph.D. degrees in electronic engineering from Tsinghua University, Beijing, China, in 2005 and 2011, respectively.

In 2010, he was a Visiting Student with the Wireless System Lab, Department of Electrical Engineering, Stanford University, Stanford, CA, USA, for five months. From 2014 to 2015, he was a Visiting Researcher with the Central Research Laboratory, Hitachi, Ltd., Tokyo, Japan. He is currently an Associate Professor with the Department of Electronic Engineering, Tsinghua University. His

current research interests include cross-layer design for multiple antenna systems, mobile edge computing, and green wireless communications.



Zhisheng Niu (M'98–SM'99–F'12) received the degree from Northern Jiaotong University (currently Beijing Jiaotong University), Beijing, China, in 1985, and the M.E. and D.E. degrees from the Toyohashi University of Technology, Toyohashi, Japan, in 1989 and 1992, respectively.

From 1992 to 1994, he was with Fujitsu Laboratories Ltd., Kawasaki, Japan. In 1994, he joined Tsinghua University, Beijing, where he is currently a Professor with the Department of Electronic Engineering. He was a Visiting Researcher with the

National Institute of Information and Communication Technologies, Koganei, Japan, from 1995 to 1996, Hitachi Central Research Laboratory, Tokyo, Japan, from 1997 to 1998, Saga University, Saga, Japan, in 2001, for one month, the Polytechnic University of New York, Brooklyn, NY, USA, in 2002, for one month, the University of Hamburg, Hamburg, Germany, in 2014, for one month, and the University of Southern California, Los Angeles, CA, USA, in 2014, for one month. He has authored or co-authored over 100 journal and over 200 conference papers in IEEE and IEICE publications. His current research interests include queueing theory, traffic engineering, mobile Internet, radio resource management of wireless networks, and green communication and networks.

Dr. Niu was a recipient of the Outstanding Young Researcher Award from the Natural Science Foundation of China in 2009 and the Best Paper Award from the IEEE Communication Society Asia-Pacific Board in 2013. He was a co-recipient of the Best Paper Award of the 13th, 15th, and 19th Asia-Pacific Conference on Communication in 2007, 2009, and 2013, respectively, the International Conference on Wireless Communications and Signal Processing in 2013, and the Best Student Paper Award of the 25th International Teletraffic Congress. He has served as the Chair of the Emerging Technologies Committee from 2014 to 2015, the Director for Conference Publications from 2010 to 2011 and the Asia-Pacific Board of IEEE Communication Society from 2008 to 2009, the Councilor of IEICE–Japan from 2009 to 2011, and a member of the IEEE Teaching Award Committee from 2014 to 2015 and IEICE Communication Society Fellow Evaluation Committee from 2013 to 2014. He has also served as the Associate Editor-in-Chief for the IEEE/CIC joint publication *China Communications* from 2012 to 2016, an Editor for the IEEE WIRELESS COMMUNICATIONS from 2009 to 2013 and *Wireless Networks* from 2005 to 2009, and is currently serving as an Area Editor for the IEEE TRANSACTIONS ON GREEN COMMUNICATIONS AND NETWORKING and as the Director for Online Content of IEEE ComSoc from 2018 to 2019. He was also selected as a Distinguished Lecturer of the IEEE Communication Society from 2012 to 2015, as well as of the IEEE Vehicular Technologies Society from 2014 to 2016. He is a Fellow of the IEICE.